

AD-A138 897


DEVELOPMENT OF THE A-6E/A-6E TRAM/KA-6D NATOPS (NAVAL  
AIR TRAINING AND OP. (U) NAVAL POSTGRADUATE SCHOOL  
MONTEREY CA D F HARGRAVE DEC 83


1/2

UNCLASSIFIED

F/G 1/3

NL

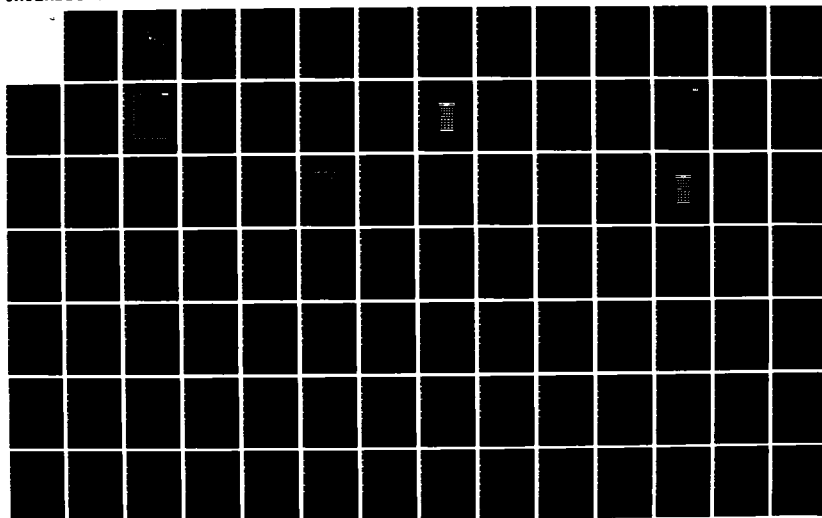

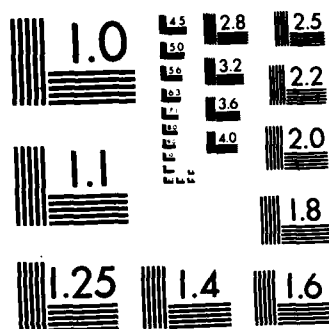

MICROCOPY RESOLUTION TEST CHART  
NATIONAL BUREAU OF STANDARDS-1963-A

AD A138897

2

# NAVAL POSTGRADUATE SCHOOL

Monterey, California



## THESIS

DTIC  
ELECTRONIC  
MAR 13 1984  
S

DEVELOPMENT OF THE  
A-6E/A-6E TRAM/KA-6D NATOPS  
CALCULATOR AIDED PERFORMANCE  
PLANNING SYSTEM (NCAPPS)

by

Douglas Francis Hargrave

December 1983

Thesis Advisor:

D. M. Layton

Approved for public release; distribution unlimited.

DTIC FILE COPY

84 03 13 078

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER	2. GOVT ACCESSION NO. AD-A238 817	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) Development of the A-6E/A-6E TRAM/KA-6D NATOPS Calculator Aided Performance Planning System (NCAPPS)		5. TYPE OF REPORT & PERIOD COVERED Master's Thesis December 1983
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) Douglas Francis Hargrave		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS Naval Postgraduate School Monterey, California 93943		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
11. CONTROLLING OFFICE NAME AND ADDRESS Naval Postgraduate School Monterey, California 93943		12. REPORT DATE December 1983
		13. NUMBER OF PAGES 136
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		15. SECURITY CLASS. (of this report) UNCLASSIFIED
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) NATOPS Computerization      A-6 Aircraft Performance Planning      Tactical Aircraft Performance Data Flight Planning      Hand-Held Calculators HP-41CV Programs      Curve Fitting		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) The performance data contained in the Naval Air Training and Operating Procedures Standardization (NATOPS) Manuals for Naval aircraft are presented primarily in graphical form. Interpretation of these graphical charts is time consuming and susceptible to error. By using multiple regression analysis and other curve fitting techniques the graphical charts can be modeled with		

DD FORM 1 JAN 73 1473

EDITION OF 1 NOV 68 IS OBSOLETE

S/N 0102-LR-014-6601

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

**SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)**

This thesis conducts the above analysis on some of the more commonly used NATOPS performance data for the A-6 aircraft model. The result is the A-6E/A-6E TRAM/KA-6D NATOPS Calculator Aided Performance Planning System (NCAPPS) which is a library of A-6 performance software developed for the Hewlett-Packard HP-41CV hand-held programmable calculator. Procedures for developing the analytical models are described and a user's manual documenting the system is included.

Mission ☐   
 Priority ☐   
 Classified ☐   
 Information ☐   
 Distribution ☐   
 Availability Codes ☐   
 Avail and/or ☐   
 Dist Special ☐   
 A1

5218  
COPY  
EXTRACTED  
2

SECURITY CLASSIFICATION OF THIS PAGE(When Data Entered)

Approved for public release, distribution unlimited.

Development of the A-6E/A-6E TRAM/KA-6D NATOPS Calculator  
Aided Performance Planning System (NCAPPS)

by

Douglas Francis Hargrave  
Lieutenant Commander, United States Navy  
B.S., California State University, Northridge, 1970  
M.B.A., Old Dominion University, 1980


Submitted in partial fulfillment of the  
requirements for the degree of

MASTER OF SCIENCE IN AERONAUTICAL ENGINEERING


from the

NAVAL POSTGRADUATE SCHOOL  
December 1983


Author:

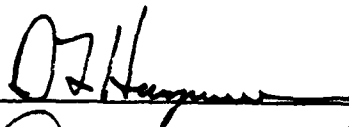

Approved by:

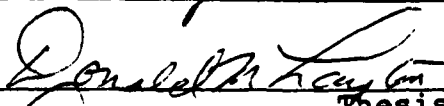

Thesis Advisor



Chairman, Department of Aeronautics



Dean of Science and Engineering

### ABSTRACT

The performance data contained in the Naval Air Training and Operating Procedures Standardization (NATOPS) manuals for Naval aircraft are presented primarily in graphical form. Interpretation of these graphical charts is time consuming and susceptible to error.

By using multiple regression analysis and other curve fitting techniques the graphical charts can be modeled with closed-form analytical equations. These equations can then be used in computer programs which perform the same functions as the original charts but with greater accuracy, speed and simplicity.

This thesis conducts the above analysis on some of the more commonly used NATOPS performance data for the A-6 aircraft model. The result is the A-6E/A-6E TRAM/KA-6D NATOPS Calculator Aided Performance Planning System (NCAPPS) which is a library of A-6 performance software developed for the Hewlett-Packard HP-41CV hand-held programmable calculator. Procedures for developing the analytical models are described and a user's manual documenting the system is included.

## TABLE OF CONTENTS

I.	INTRODUCTION -----	7
II.	DISCUSSION -----	10
A.	PROBLEM DEFINITION AND OBJECTIVES -----	10
1.	Modeling the System -----	10
2.	Selection of Hardware -----	11
3.	Software -----	12
4.	Documentation -----	12
B.	PROBLEM RESOLUTION -----	13
1.	Multiple Regression Analysis -----	13
2.	Hardware -----	18
3.	NCAPPS -----	18
4.	User's Manual -----	21
C.	EXAMPLE CURVE ANALYSIS -----	22
D.	OTHER CURVE FITTING METHODS USED -----	28
III.	CONCLUSIONS AND RECOMMENDATIONS -----	29
APPENDIX A:	A-6E/A-6E TRAM/KA-6D NATOPS Calculator Aided Performance Planning System (NCAPPS) User's Manual -----	31
	LIST OF REFERENCES -----	135
	INITIAL DISTRIBUTION LIST -----	136

## LIST OF FIGURES

1. Maximum Refusal Speed -----	14
2. The HP-41CV Hand-Held Programmable Calculator ----	19
3. Normal Take-off Distance and Line Speed Check ----	23
4. Normal Take-off Distance and Line Speed Check Subchart 2 Regression Data -----	24
5. Normal Take-off Distance and Line Speed Check Subchart 2, Prediction of Non-regressed Points ---	27

## I. INTRODUCTION

The use of the extensive performance data contained in the Naval Air Training and Operating Procedures Standardization (NATOPS) manual is essential for the safe and effective operation of Naval aircraft. This information, much of it in the form of graphical charts, should be consulted both for mission planning as well as during certain inflight evolutions. Unfortunately, the complexity of these charts has resulted in a reluctance on the part of crewmembers to refer to them with regularity. As documented by both Siegel [Ref. 1] and Restivo [Ref. 2] in separate studies, their interpretation and use is time consuming, extremely error prone and totally impractical in the flight environment. As a consequence, most squadrons have resorted to "preplanned" mission data in the form of kneeboard cards containing performance data for several common configurations and missions. Often, the performance data used in mission planning is based on prior experience or habit and passed along via word-of-mouth. The annual NATOPS check may be the only time a crewmember actually gets "back into the book".

An obvious solution to this problem is to computerize the NATOPS charts and tables. Such a system would quickly and accurately provide operating and mission planning

performance data based on configuration and flight regime parameters input by the user. In addition to increased accuracy, the speed afforded by an automated system would give planners more flexibility, permitting the substitution of different mission parameters until an optimum profile or configuration is found. Finally, the system would promote the regular use of NATOPS data by flight crews, resulting in safer and more efficient use of the aircraft and its weapon systems.

Previous efforts [Refs. 1 and 2] have demonstrated the feasibility of developing analytical models which accurately describe the graphical curves found in NATOPS. Two recent studies conducted at the Naval Postgraduate School by Campbell and Champney [Ref. 3] and Ferrell [Ref. 4] resulted in a series of performance programs written for the HP-41CV hand-held programmable calculator. Sponsored by the Naval Air Development Center, they were directed toward developing a Flight Performance Advisory System (FPAS) for several tactical Navy aircraft. The propose of FPAS was to provide flight crews with timely flight profile information which would result in the most efficient use of fuel. Although the objective of FPAS was energy conservation, the programs were also useful as general purpose planning and operating aids.

This thesis was prepared in response to a letter received from a West Coast A-6 squadron in early 1983

suggesting computerization of the A-6 NATOPS performance curves. Its purpose is to develop and document a series of programs based on the most important and commonly used A-6E/A-6E TRAM/KA-6D [Refs. 5 and 6] performance charts. The A-6E/A-6E TRAM/KA-6D NATOPS Calculator Aided Performance Planning System (NCAPPS) utilizes the HP-41CV calculator and is intended to be a nucleus of programs which, if proven to be useful, can be expanded to include additional NATOPS and Tactical Manual charts. The concepts initiated by Siegel and Restivo and refined by the FPAS programs form the foundation for this effort.

## II. DISCUSSION

### A. PROBLEM DEFINITION AND OBJECTIVES

The problem of developing a computerized NATOPS performance planning system was partitioned into four major areas.

#### 1. Modeling the System

For each program, analytical models of the corresponding NATOPS curves suitable for program coding had to be found. Closed-form equations which describe the output variable in terms of one or more independent variables can be developed from regression analysis or curve fitting. Another method is to store a table of known results and use an interpolation routine to refine the output.

It was decided at the outset that, since NATOPS is the officially sanctioned source of performance data, the programs must be designed to conform exactly to the published NATOPS curves. No attempt would be made to refine or reevaluate the existing data.

The order of accuracy should be at least as good as the NATOPS charts. This is normally no better than about two percent but varies somewhat from case to case. In general, to provide acceptable accuracy the following tolerances were established:

Airspeed: within 2 knots or 2 percent, whichever is greater

Altitude: within 100 feet

Weight: within 100 pounds

Time: within 1 minute

Fuel flow: within 50 pounds per hour

Distance: within 2 nautical miles

The above tolerances are valid only over the range of values that the independent variables assume in the NATOPS charts. Extrapolation beyond these limits is not permitted.

## 2. Selection of Hardware

Once the performance data has been modeled it can be adapted to almost any computing system. The most important criteria for selection of an appropriate device are:

### a. Portability

The device should be completely portable and self-contained so that it is suited for both pre-flight and in-flight operation.

### b. Simplicity

The device should be relatively simple to operate and require little training to become proficient in its use.

### c. Memory

Sufficient memory should be available to permit either direct storage of the programs or their timely access from a mass storage device.

#### d. Interactive displays

The device should be capable of displaying interactive ques to the user. Program output should be in a clearly readable alphanumeric format. Additional desirable features are low cost, durability and maintainability.

### 3. Software

Once the performance data has been modeled and a specific computing device selected, the system software can be developed. Simplicity of operation, consistency of input/output procedures and accuracy should be the foremost considerations.

### 4. Documentation

A user's manual which fully documents the performance planning system must be developed. It should include detailed user instructions which explain the purpose of each program and the required inputs. The units used for the inputs and outputs should be defined along with any special features or program limitations. An example problem should be presented showing exact user procedures. Documentation should also include listings of the program codes, flowcharts and all equations used. The variables used in the equations along with their units should be defined. Finally, for calculator programs, program size and the usage of data storage registers and program flags should be given.

## B. PROBLEM RESOLUTION

### 1. Multiple Regression Analysis

Most of the performance charts found in the NATOPS Manual require the user to traverse several subcharts using known values of various independent variables and moving sequentially from chart to chart until the desired performance variable is obtained. A typical example is the chart for Maximum Refusal Speed (Figure 1) which contains five subcharts relating six independent variables. For each subchart analytical forms of the two-dimensional curves are easily obtained but a difficulty arises because of the presence of a third variable. For example, in the Refusal Speed chart the baseline value for gross weight is a function of two other variables; the pressure altitude output baseline and runway length. An entire family of curves exists for various runway lengths, each curve having a different slope and position. Siegel [Ref. 1] approached this problem by fitting a collocating polynomial to the third variable curves (i.e. runway length), then developing an additional polynomial which predicted the coefficients of the first based on the behavior of the variable in question. In this way the whole family of curves could be modeled allowing interpolation (but not extrapolation) between the curves. Campbell and Champney [Ref. 3] approached the problem in a somewhat different manner using multiple regression

# MAXIMUM REFUSAL SPEEDS (single engine)


P-8 ENGINE

MILITARY POWER  
HARD, DRY RUNWAY


AIRCRAFT CONFIGURATION:  
FLAPS 30°, GEAR-DOWN  
ALL EXTERNAL STORE CONFIGURATIONS

DATE: 1 MAY 1968  
DATA BASE: ESTIMATED

FUEL GRADE: JP-8  
FUEL DENSITY: 6.8 LB/GAL

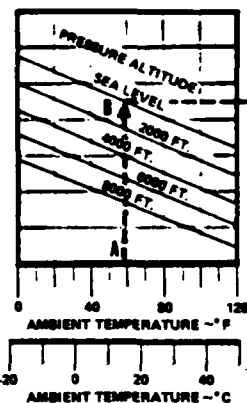

- NOTE
1. ——— REFINED  
——— TAILING
  2. (+) UPWIND CORRECTION  
(-) DOWNWIND CORRECTION
  3. REFUSAL SPEED IS THE  
VALUE OBTAINED FROM CHART  
OR LIFT OFF SPEED, WHICHEVER  
IS LOWER.

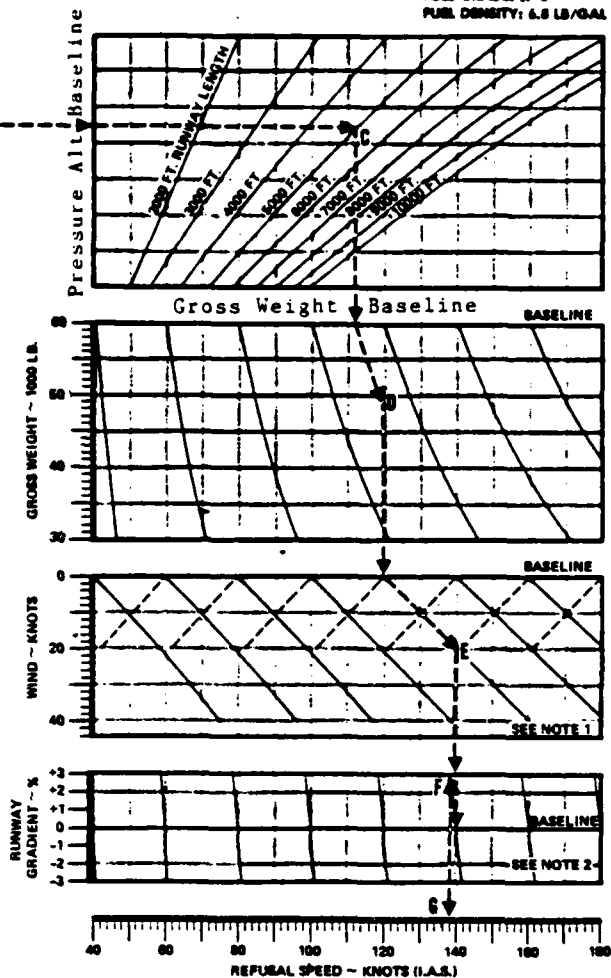

8-ADA1-648

Figure 11-11 Maximum Refusal Speed (Single Engine)

11-18

Figure 1 - Maximum Refusal Speed

analysis. In a given chart each of the independent variables are strongly correlated with the dependent variable. If data points are taken over the range of values assumed by each variable, a multidimensional hyperplane can be fitted between the points. The equation of this hyperplane represents a predictive analytical expression for the dependent variable.

Experimentation with each of the above methods led to the choice of the latter due to the excellent software available for multiple regression analysis, the superior accuracy achieved and the relative ease of completing the analysis.

Although a single linear equation can be developed using multiple regression analysis, it normally fails to describe the dependent variable with the degree of accuracy required in the present application. A two-step procedure was used to solve this problem. First the number of independent variables was reduced to no more than three. This was done by splitting the analysis into more than one step, ultimately obtaining several coupled regression equations. The second step was to transform the independent variables so that they are represented as powers, cross-products or exponentials prior to completing the regression analysis.

Arriving at a final set of analytical equations using regression analysis was an iterative process which consisted of the following steps.

a. The NATOPS chart was subdivided into subsections containing three or fewer independent variables.

b. Data were obtained from the NATOPS chart. Sufficient data points were taken so that the full range of each variable was represented. To achieve acceptable accuracy this typically required three to five values for each variable. As an example, five values of each of three independent variables would result in  $5 \times 5 \times 5 = 125$  data points.

c. A transformation of the independent variables was chosen which achieved the required order of accuracy. In this analysis first and second degree cross products and second and third powers of the type  $AB$ ,  $A^2B$ ,  $A^2$ ,  $A^3$  were sufficient. Occasionally an exponential transformation of the dependent variable of the form  $y = \exp[f(A,B,C)]$  had to be made.

d. A computer multiple regression analysis was performed on the first degree and transformed variables. The P-series of the Biomedical Computer Programs package [Ref. 7] developed at the University of California contains a routine (P9R) which selects the best subset of regression variables from a large group of independent variables. It also has an option within the program which makes the

required variable transformations. The best subset is the one with the highest multiple coefficient of determination  $R^2$ . This is the ratio of the variation explained by the multiple regression equation to the total variation of the dependent variable [Ref. 8]. For the present application  $R^2$  had to closely approach unity to achieve the required accuracy.

e. Extraneous variables were eliminated. This was the interactive part of the process normally requiring three or four computer runs in which linearly dependent and redundant variables were culled. The object was to get the highest possible  $R$  with the fewest variables. Experience showed that, in general, an  $R^2$  greater than 0.993 was needed to comply with the desired tolerances.

f. The final equation was tested. A program stub was written in which each equation was verified both for the original data as well as new intermediate data points. When all the regression equations for a given chart had been obtained and verified, they were combined into a single program which was rechecked using the same procedure. If the required tolerances were not achieved, the equations were refined further by adding additional transformations or trying an exponential transformation of the dependent variable. It is interesting to note that adding new data points did not improve the results but rather tended to degrade them further.

## 2. Hardware

The Hewlett-Packard HP-41CV programmable calculator (Figure 2) was selected as the computing device to be used for NCAPPS. With over 2000 bytes of program memory it is capable of handling relatively large and complex programs containing hundreds of instructions. It is fully portable, battery powered and its memory can be augmented with magnetic cards, digital tapes or memory modules. It is also capable of receiving and displaying alphanumeric information. Its operation is similar to many hand-held calculators, resulting in a minimum amount of user training. [Ref. 9] Lastly, it was successfully used with the FPAS programs which were similar in many ways to NCAPPS. Its major deficiency appears to be a susceptibility to large fluxes of electromagnetic energy. During inflight trials of the E-2C FPAS the calculator failed when the aircraft's radar was turned on [Ref. 4]. This may not occur in the A-6 aircraft due to the different radar type and the forward directed main lobe but still remains an area for further investigation. The installation of a suitable RF shield would preclude this occurrence in either aircraft.

## 3. NCAPPS

The following eight programs, representing some of the most commonly used NATOPS performance planning data, were written as the initial NCAPPS library.

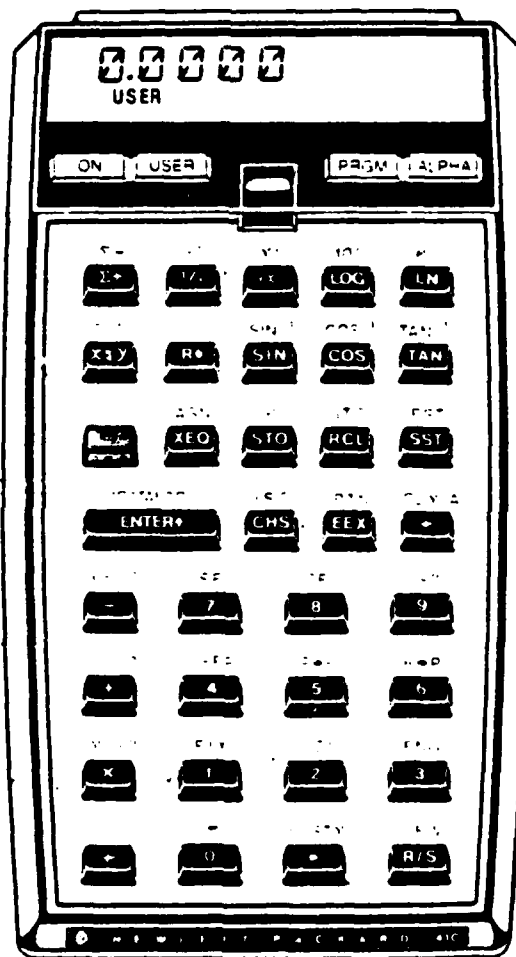


Figure 2 - Hewlett-Packard HP-41CV Calculator

- a. Asymetric external store loading.
- b. Maximum range climb, cruise and descent profile.
- c. Drag count and external stores weight.
- d. Landing and approach speeds.
- e. Maximum refusal speed (single engine).
- f. Tanker mission profile - KA-6D.
- g. Normal take-off distance and line speed check.
- h. Crosswind take-off/landing.

The NCAPPS programs were written to be user friendly and simple to operate. Once loaded and executed they are fully interactive, providing alphanumeric prompts to the user who is required only to enter numeric data, activate one of several user defined keys, or depress the {R/S} (RUN/STOP) key to proceed with program execution after a halt.

Each program was verified for stability as well as compliance with the previously stated tolerances across the range of the independent variables. This range is the same as that found in the original NATOPS chart and usually covers every reasonable operational situation. It is re-emphasized that the behavior of the governing equations as well as the aircraft itself is unknown beyond these limits and under no circumstances should extrapolation be attempted.

The programs vary in size from less than 50 to nearly 800 program steps. The larger programs occupy nearly all

of program memory precluding the loading of additional programs. This necessitates the use of an auxiliary program storage device in order to make the system practical. Although the programs can be read into memory from magnetic cards, this is normally time consuming and inconvenient. However, by storing all the software on an HP 82161A Digital Cassette Drive, any program can be loaded into main memory in less than thirty seconds. A further possibility exists for the creation of one or more plug-in read-only-memory (ROM) modules which contain the NCAPPS software. These modules can be developed by the Hewlett-Packard company on request.

Some of the NCAPPS routines were modeled after the earlier FPAS programs. This includes the general structure of the Crosswind Take-off/Landing program (XWL) [Ref. 4], and portions of the Climb, Cruise and Descent program (CCD) [Ref. 3].

#### 4. User's Manual

A user's manual (Appendix A) was written which fully documents the NCAPPS programs. It consists of a user procedures section which contains program descriptions, user instructions and example problems followed by an appendix which provides more detailed documentation such as flow charts, program listings and governing equations. The user procedures section is the most important part of the manual and contains the primary information needed to operate the

system. The appendix contains mostly supplemental documentation. It is expected that the HP-41CV Owner's Handbook [Ref. 9] will be used as a companion publication.

#### D. EXAMPLE CURVE ANALYSIS

The following example is presented to illustrate the procedure used to obtain an analytical equation for a graphically represented NATOPS performance curve. An equation will be developed which describes a portion of the NATOPS Normal Take-off Distance and Line Speed Check chart (Figure 3), [Ref. 5].

1. The main chart consists of five subcharts, each containing three variables. Each subchart was analyzed separately in accordance with the criterion stated above. The second subchart from the top which incorporates the runway temperature was chosen for this illustration. The dependent variable is the baseline value  $K_2$  which is the entering value for the altitude subchart below. The baseline value represents the horizontal axis which, for this analysis, was arbitrarily set from zero to fourteen corresponding to the vertical grid lines. The independent variables are the baseline value  $K_1$  received from the preceding subchart and the temperature in degrees Fahrenheit (T).

2. Data were manually recorded from the subchart (Fig. 4). Noting that eight guide curves are plotted on the graph, the altitude baseline value  $K_2$  was recorded for each

# **NORMAL TAKE-OFF DISTANCE AND LINE SPEED CHECK**

**P-8 ENGINE**

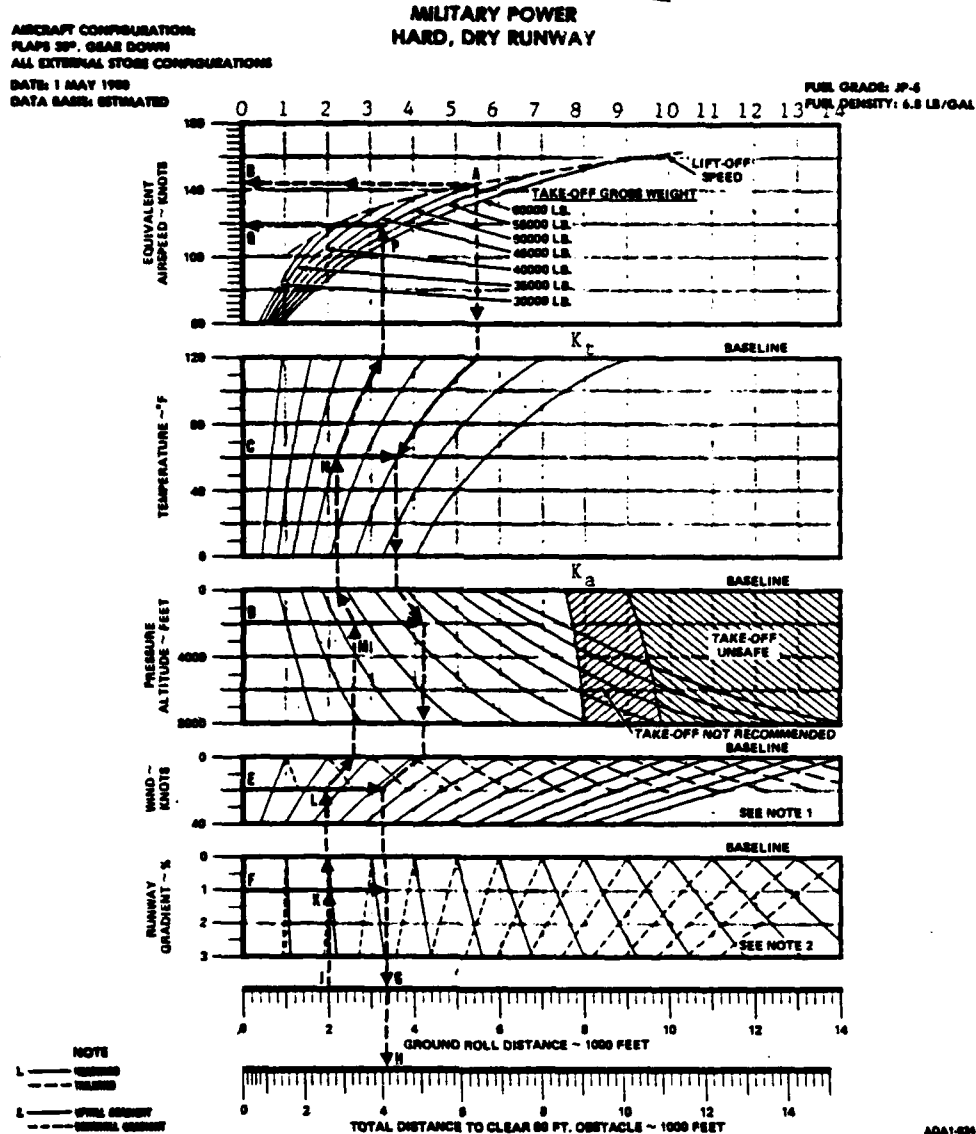


Figure 11-12 Normal Takeoff Distance and Line Speed Check

11-19

Figure 3 - Normal Take-off Distance and Line Speed Check

DEPENDENT VARIABLE			INDEPENDENT VARIABLES	
Altitude Baseline ( $K_a$ )			Temperature Baseline ( $K_t$ )	Temperature ( $T$ )
From chart	Predicted	Error		
0.95	0.93	0.02	0.95	120
0.75	0.80	0.05	0.95	80
0.60	0.63	0.03	0.95	40
0.40	0.43	0.03	0.95	0
1.60	1.57	0.03	1.60	120
1.30	1.27	0.03	1.60	80
1.03	1.00	0.03	1.60	40
0.80	0.77	0.03	1.60	0
2.30	2.27	0.03	2.30	120
1.80	1.79	0.01	2.30	80
1.40	1.41	0.01	2.30	40
1.20	1.13	0.07	2.30	0
3.30	3.27	0.03	3.30	120
2.50	2.53	0.03	3.30	80
1.95	1.98	0.03	3.30	40
1.60	1.63	0.03	3.30	0
4.25	4.23	0.02	4.25	120
3.25	3.23	0.02	4.25	80
2.50	2.52	0.02	4.25	40
2.05	2.10	0.05	4.25	0
5.50	5.50	0.00	5.50	120
4.20	4.15	0.05	5.50	80
3.25	3.21	0.04	5.50	40
2.65	2.68	0.03	5.50	0
7.00	7.01	0.01	7.00	120
5.20	5.22	0.02	7.00	80
4.05	3.99	0.06	7.00	40
3.30	3.32	0.02	7.00	0
9.00	8.98	0.02	9.00	120
6.50	6.59	0.09	9.00	80
5.00	4.94	0.06	9.00	40
4.10	4.05	0.05	9.00	0

Figure 4 - Normal Take-off Distance and Line Speed Check  
Subchart 2 Regression Data

of the eight corresponding values of  $K_t$  and four evenly spaced temperatures (0, 40, 80 and 120). Thus  $4 \times 8 = 32$  data points were obtained.

3. A transformation of the independent variables was developed for the initial computer analysis. It was anticipated that some of the initial transformed variables and possibly an untransformed variable would be eliminated at this step with additional refinements to be made in later runs if necessary. The initial independent variables chosen for this example were  $K_t$ ,  $T$ ,  $TK_t$ ,  $T^2K_t$ ,  $TK_t^2$ ,  $T^2$ ,  $K_t^2$ ,  $T^3$ ,  $K_t^3$ .

4. The computer analysis was completed using BIMED P9R (CP option) which performs a multiple regression analysis and selects those five subsets of regression coefficients which have the lowest Mallows'  $C_p$ . Mallows'  $C_p$  is defined as [Ref. 7]:

$$C_p = \text{RSS}/s^2 - (N - 2p')$$

where

RSS     is the residual sum of squares for the best subset being tested.

$p'$      is the number of variables in the subset (including the intercept).

$s^2$      is the residual mean square based on the regression using all independent variables.

$N$      is the number of cases.

The residual is the difference between the observed and predicted value of the dependent variable.

5. On the first run the variables  $TK_1$ ,  $K_1^2$  and  $T^3$  were eliminated. The best subset, which had six independent variables, had an  $R^2$  of 0.99970 and a Mallows'  $C_p$  of 7.38. The regression equation obtained was

$$K_a = 0.523991K_1 + 0.00524248T + 3.024 \times 10^{-5}T^2K_1 \\ + 9.50674 \times 10^{-5}TK_1^2 - 3.81333 \times 10^{-5}T^2 - 8.17348 \times 10^{-4}K_1^3 \\ - 0.0673642.$$

Due to the high coefficient of multiple determination no further runs were indicated for this case.

6. To test the results a program stub was written for the HP-41 which calculated the value of the dependent variable  $K_a$  predicted by the above equation. In Figure 4, regressed values of  $K_a$  obtained from the subchart are compared to those predicted by the equation. Figure 5 provides the same comparison for ten randomly selected points not used in the regression analysis. The average absolute error of  $K_a$  was 0.03 with a maximum error of 0.09. However, it is emphasized that the last significant digit shown for the manually obtained  $K_a$  is quite uncertain. In practice it was found that the regressed equation provided stability to the curves and tended to correct errors which appeared to be due to slight misalignments of the printed grid lines. For the five subcharts contained in the entire Take-off Distance and Line Speed Check chart an overall baseline error of 0.075 was estimated. This equates to 75 feet of ground roll which is well within the level of accuracy desired.

DEPENDENT VARIABLE			INDEPENDENT VARIABLES	
Altitude Baseline ( $K_a$ )			Temperature Baseline ( $K_t$ )	Temperature ( $T$ )
From Chart	Predicted	Error		
0.85	0.87	0.02	0.95	100
1.10	1.07	0.06	1.60	50
1.70	1.68	0.02	2.30	70
2.20	2.23	0.03	3.30	60
2.25	2.27	0.02	4.25	20
4.40	4.45	0.05	5.50	90
3.10	3.04	0.06	5.50	30
6.00	6.05	0.05	7.00	100
4.60	4.54	0.06	7.00	60
4.40	4.41	0.01	9.00	20

Figure 5 - Normal Take-off Distance and Line Speed Check  
Subchart 2, Prediction of Non-regressed Points

#### D. OTHER CURVE FITTING METHODS USED

In cases where only two variables were present a simplified method of curve fitting was used. The HP-41C/CV Standard Applications Handbook [Ref. 10] contains a curve fitting program which will fit a linear, logarithmic, exponential or power curve to a two dimensional set of data points. For instance, the power curve fitting routine was used in the top subchart of Figure 3 to obtain lift-off speed (V) as a function of take-off gross weight (W). This resulted in the equation

$$V = 21.41W^{0.4854}$$

which predicts lift-off speed to within one knot.

### III. CONCLUSIONS AND RECOMMENDATIONS

The A-6 NATOPS Calculator Aided Performance Planning system applies the concept of NATOPS performance data computerization to a specific aircraft model. This thesis demonstrated the feasibility of such an effort by adapting some of the more useful A-6 planning data to a specific computing device and developing the documentation which would be required for use of the programs by the fleet.

The NCAPPS software incorporates only a fraction of the A-6 performance data which is suitable for computerization. This leaves considerable room for expansion, particularly to include the data which describe emergency situations such as the various single engine performance curves. Another useful application would be computerization of the weapons delivery data found in the aircraft Tactical Manual. The charts for sight angles, release sensitivities, dive recovery, fuzing and many others suffer from the same complexities which make the NATOPS material difficult to use. Programs to compute release error sensitivities and wind corrections would be especially useful for inflight weapon impact analysis.

A shortcoming of the HP-41CV calculator is its limited ability to display program output. A solution is the use of a micro-computer with a video or large liquid crystal display for the NCAPPS system. The recent introduction

of several highly portable, large memory micro-computers makes this an attractive option which should be investigated further. An additional benefit would be the ability to use a computer language such as BASIC which would permit greater efficiency and flexibility in programming the performance equations.

The degree of acceptance NCAPPS or similar systems receive at the squadron level is of overriding importance and will ultimately determine whether further development is warranted. In their present form the NCAPPS programs are easily understood and simple to operate, minimizing the investment in learning time required by crewmembers. To determine its usefulness, it is recommended that NCAPPS next be evaluated over an extended period by an operational fleet squadron.

# **A-6E/A-6E TRAM/KA-6D**

## **NATOPS**

**Calculator Aided**

**Performance Planning**

**System**

**(NCAPPS)**

**USER'S MANUAL**

# TABLE OF CONTENTS

INTRODUCTION -----	3
THE HP-41CV CALCULATOR -----	5
USER'S MANUAL ORGANIZATION -----	7
USER PROCEDURES -----	8
GENERAL COMMENTS -----	9
ASYMETRIC EXTERNAL STORE LOADING CATAPULT AND ARREST AND LIMITATIONS -----	11
MAXIMUM RANGE CLIMB, CRUISE AND DESCENT PROFILE	13
DRAG COUNT AND EXTERNAL STORES WEIGHT -----	23
LANDING AND APPROACH SPEEDS -----	28
MAXIMUM REFUSAL SPEED (SINGLE ENGINE) -----	30
TANKER MISSION PROFILE - KA-6D -----	32
NORMAL TAKE-OFF DISTANCE AND LINE SPEED CHECK -	34
CROSSWIND TAKE-OFF/LANDING -----	36
APPENDIX -----	38
ASYM - ASYMETRIC EXTERNAL STORE LOADING CATAPULT AND ARREST LIMITATIONS -----	40
CCD - MAXIMUM RANGE CLIMB, CRUISE AND DESCENT PROFILE -----	43
DRAG - DRAG COUNT AND EXTERNAL STORES WEIGHT --	61
LAA - LANDING AND APPROACH SPEEDS -----	82
RS - MAXIMUM REFUSAL SPEED (SINGLE ENGINE) ----	85
TANK - TANKER MISSION PROFILE - KA-6D -----	88

TO - NORMAL TAKE-OFF DISTANCE AND LINE SPEED CHECK -----	91
XWL - CROSSWIND TAKE-OFF/LANDING -----	100
LIST OF REFERENCES -----	103

## INTRODUCTION

The A-6E/A-6E TRAM/KA-6D NATOPS Calculator Aided Performance Planning System (NCAPPS) was designed to increase the speed and accuracy of mission planning. It consists of a series of interactive programs which employ analytic representations of the aircraft performance curves found in the NATOPS Manual [Ref. 1]. These programs enable a user to plan various segments of a mission without the need to refer to complex and often difficult to read graphical charts.

The heart of the NCAPPS system is the Hewlett-Packard HP-41CV hand-held programmable calculator. This device was selected because of its portability, ease of operation, large memory capacity and its ability to provide interactive alphanumeric prompts to the user. In addition, the availability of various mass storage and data retrieval devices for the HP-41CV allows the entire NCAPPS library to be accessed from a single calculator.

The advantages of NCAPPS are speed, accuracy and flexibility. Once familiar with the operation of the calculator and the program library, a user can plan a typical mission almost as fast as the data can be written onto a jet card. Greater accuracy is obtained by eliminating the need to extract and interpolate data from graphical

performance curves, a process extremely susceptible to error. Finally, the ease with which mission parameters can be varied adds to flexibility in mission planning. The ability to experiment with different fuel loads, mission radii, winds aloft, etc. allows the planner to better evaluate the available performance tradeoffs.

Some of the NCAPPS programs are useful during flight operations both by flight crews as well as Tower, PRIFLY, and CATCC personnel. In general, these programs are small enough so that two or three can be loaded into the calculator's program memory simultaneously. As future programs are added to NCAPPS, a full range of programs will be available for inflight and preflight planning use.

The output from NCAPPS is designed to correspond with the information contained in NATOPS. In fact, the programs were developed from data obtained directly from the NATOPS charts. Occasionally roundoff differences or perturbations in the analytic models may cause small discrepancies between the NATOPS results and the program output. Testing of the programs over the range of each variable has shown that these differences are typically insignificant and well within the level of variation due to pilot technique or individual aircraft differences.

## THE HP-41CV CALCULATOR

The HP-41CV (Figure 1) is an advanced alphanumeric programmable calculator with sufficient program memory and data storage registers to allow execution of complex general purpose programs which may contain up to several hundred program steps. In addition, programs can be rapidly entered into program memory using a magnetic card reader, a digital cassette drive, memory expansion modules or other available mass storage devices. This capability is necessary since some of the larger NCAPPS programs occupy most of program memory and must be cleared prior to loading another program. The method of program storage will not be discussed further here although it is assumed that a viable means of storing the NCAPPS software is available to the user. The appropriate users manuals [Ref. 2] should be consulted for detailed operating instructions.

Once a program is loaded into program memory, execution is quite simple. However, two items must initially be checked. The first is memory register allocation which is simply the number of memory registers set aside either for data storage or for program instructions. By executing "SIZE 027", which allocates 27 data storage registers, all current NCAPPS programs except "DRAG" can be run. (To run "DRAG" execute "SIZE 015".) This is done by depressing

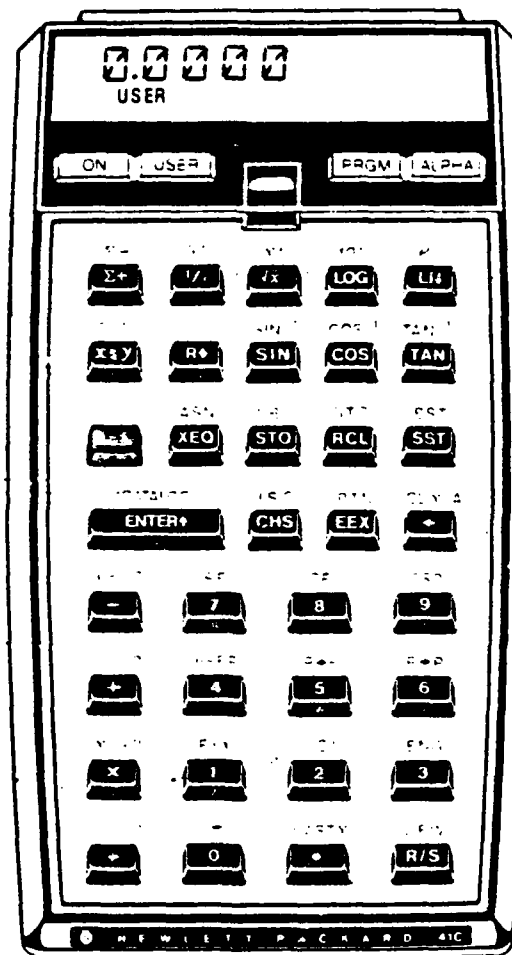


Figure 1 - Hewlett-Packard HP-41CV Calculator

[XEQ] then [ALPHA] which allows alpha characters to be entered, and then spelling S-I-Z-E. Depress [ALPHA] again signifying that the alpha string "SIZE" is complete and note the display "SIZE\_\_". Now enter "027" and observe that the display returns to its original value. You have just executed the function "SIZE" and partitioned 27 data storage registers to be used by NCAPPS. This is essentially the same procedure used to initiate execution of all of the NCAPPS programs. The second item to check is that the calculator is in the "USER" mode. This allows the programs to receive inputs from certain user defined keys and is done by simply depressing the "USER" key on the top panel of the calculator so that "USER" is visible in the display. When the above items are completed and a program has been loaded into main memory, the system is ready to operate.

#### USER'S MANUAL ORGANIZATION

The NCAPPS program documentation contained in this manual is divided into two sections; a User Procedures section which contains program descriptions, operating instructions and examples, and an Appendix which contains flow charts, program listings, data storage register contents and the equations used to analytically model the NATOPS performance data. By reading the User Procedures section and working through the example problems, a user

with a basic knowledge of the HP-41CV should have no difficulty mastering the system.

## USER PROCEDURES

In this section each NCAPPS program is listed as follows:

1. PROGRAM NAME. This is the program name recognized by the calculator for the program in question.
2. PROGRAM DESCRIPTION. This subsection contains a general description of the program including program inputs and outputs and their respective units (knots, feet, pounds, etc.). Special program features and/or limitations are also stated.
3. EXAMPLE PROBLEM AND USER INSTRUCTIONS. An example problem using a typical situation or configuration is presented for each NCAPPS program. Step-by-step instructions showing the exact keystrokes and output displays are provided. Specific key labels are indicated by brackets [], while numeric or alphanumeric inputs are shown without brackets.
4. REFERENCE. The NATOPS chart used to develop the program is cited. In some of the larger programs such as "CCD" (Climb, Cruise and Descent), many charts are incorporated in the various sub-sections of the program.

## GENERAL COMMENTS

1. The user should recognize that a display with a question mark is a prompt requiring an input response. In order to conserve program memory, these prompts have been abbreviated, occasionally requiring some prior familiarity on the part of the user. This is quickly obtained with regular use of the programs.
2. A display with no question mark indicates either an intermediate or final answer or an advisory remark. In most cases the program will halt program execution until the user presses the {R/S} key, allowing time to record the output.
3. At the end of each program, unless stated otherwise, pressing the {R/S} key will return execution back to the beginning of the program allowing repeated runs.
4. If an input is incorrectly entered it may be corrected by pressing the {CLX} key and re-entering it as long as the {R/S} key has not been pressed. If the {R/S} key has been pressed, it is recommended that the program be re-initiated.
5. If the message "NONEXISTENT" is displayed,
  - a. Check that the desired program has been loaded.
  - b. Ensure that "SIZE 027" (or "SIZE 015" for "DRAG") has been executed.

6. The equations which model the NATOPS data are based on the range of the operating variables found in NATOPS. These ranges are usually sufficient to cover every feasible operating situation. Extrapolation beyond these limits will result in unreliable output and should not be attempted.

# ASYMETRIC EXTERNAL STORE LOADING CATAPULT AND ARREST LIMITATIONS

1. PROGRAM NAME: ASYM

2. DESCRIPTION

This program computes the wing static moment when given the stores load in pounds on stations one, two, four and five. The static moment is displayed (positive for starboard asymmetry and negative for port asymmetry) and the user is advised whether the moment is within limits for catapult or arrested landing. Asymmetry is determined using the relation

$$\begin{aligned} &(\text{Sta 5 load} - \text{Sta 1 load}) * 11.75 + \\ &(\text{Sta 4 load} - \text{Sta 2 load}) * 7.9 \leq \pm 21,150. \end{aligned}$$

3. EXAMPLE PROBLEM AND USER INSTRUCTIONS

Two MK 82 Snakeye bombs are hung on each of the station 1 and station 2 MERs. The stations 4 and 5 MERs are empty. Should a shipboard landing be made?

Keystrokes:	Display:	Instructions:
{XEQ}{ALPHA}ASYM{ALPHA}	STA 2 LOAD?	Enter wing station
1144 {R/S}	STA 2 LOAD?	loads in pounds.
1144 {R/S}	STA 4 LOAD?	

Note: In this example MER weight can be neglected since there are MERs on all four wing stations resulting in symmetry.

0 {R/S}	STA 5 LOAD?
---------	-------------

Keystrokes:	Display:	Instructions:
0 {R/S}	MOMENT= -22,840	
	NO GO	
{R/S}	STA 2 LOAD?	Reinitializes Program

Port static asymmetry is 22,840 ft-lb which exceeds the 21,150 ft-lb allowable. An arrested landing should not be made in this configuration.

#### 4. REFERENCE

A-6E/A-6E TRAM/KA-6D NATOPS Manual, p. 128, Fig. 1-50, Carrier Limitations.

## MAXIMUM RANGE CLIMB, CRUISE AND DESCENT PROFILE

1. PROGRAM NAME: CCD

2. DESCRIPTION

This program calculates all time, distance, fuel and airspeed parameters needed to plan a typical long range mission flown at maximum range airspeeds and optimum cruise altitude. The program will permit sufficient deviation from optimum cruise altitude to allow compliance with ATC altitude restrictions. Launch and recovery at sea level are assumed.

Analytical representations of performance data obtained from various NATOPS climb, cruise and descent graphs are used to generate program output which is valid for any allowable gross weight, fuel load or external load. During each phase of the mission profile the aircraft gross weight is updated to provide accurate calculations. Forecast climb, cruise and descent winds as well as outside air temperature deviations of up to 20 degrees Celsius (from ICAO Standard) can be incorporated.

The program contains several distinct subsections which are summarized as follows:

a. Data Input. The following information is input using interactive prompts from the calculator:

(1) Aircraft empty weight in pounds.

- (2) Initial fuel weight in pounds (including external fuel).
- (3) External stores weight in pounds (excluding drop tank fuel).
- (4) Drag count.
- (5) Total mission distance in nautical miles.
- (6) Average climb headwind or tailwind component in knots (all wind entries will assume a positive headwind or a negative tailwind. Depress [CHS] to indicate a negative value).
- (7) Average descent headwind or tailwind component in knots.
- (8) Expected deviation from ICAO Standard Day temperatures in plus or minus degrees Celsius during the climb and/or cruise phases of the mission.
- (9) Estimated fuel consumed during start, taxi and takeoff (STTO) in pounds.

b. Optimum Altitude. The program will display the optimum cruise altitude as a flight level (i.e. FL335 indicates a pressure altitude of 33,500 ft). The user responds by entering the desired 3-digit flight level. To ensure program accuracy, this should be within 2000 feet of the optimum altitude displayed previously.

c. Climb and Descent. The program now calculates climb

and descent times and distances. If the sum of the climb and descent distances are greater than the total mission distance, no cruise legs are calculated and a peak altitude where the pilot should transition from a climb to a descent is computed. The routine for calculating this altitude and distance is described in the appendix.

d. Climb. Climb distance in nautical miles, climb time in minutes and climb fuel in thousands of pounds are displayed. Also, climb calibrated airspeed and the passing flight level at which 0.7 mach should be intercepted are shown. This climb profile ensures that optimum climb distance, time and fuel consumed are obtained.

e. Cruise. Once the user has obtained the climb distance above, the number of cruise legs can be determined. This is normally based on distances between airway or mission checkpoints, but can also be based on the expected winds along the route of flight. It may be advantageous to split a single long leg into more than one segment if the winds vary significantly along that leg. For quick estimating, the user may also decide to represent the cruise portion as just a single leg to simplify the calculations.

The program prompts for the number of cruise legs and then displays the distance remaining to the descent point. If the user enters a distance greater than the distance remaining, the program repeats the prompt until a

satisfactory response is obtained. The user should ensure that the distance entered for the last cruise leg is the same as the distance remaining to the descent point.

Next the program prompts for the leg wind. This is the average headwind or tailwind component for the leg and is entered using the convention given above.

The program will display, for each leg, the best range mach number, true airspeed, ground speed, elapsed time in minutes, fuel flow in pounds per hour, leg fuel consumed in thousands of pounds, and fuel remaining at the completion of the leg in thousands of pounds.

f. Descent. After completing the cruise calculations (or climb calculations if no cruise legs are required) the program will calculate and display the descent point in nautical miles from the destination, descent time in minutes and descent fuel in thousands of pounds.

g. Mission Summary. The final portion of the program displays total time enroute in minutes, fuel remaining at the destination in thousands of pounds and total fuel required in thousands of pounds.

### 3. EXAMPLE PROBLEM AND USER INSTRUCTIONS


Aircraft: A-6E TRAM with turret, full internal fuel with  
a full AERO-1D drop-tank mounted on station 3,  
4 empty MERS loaded on stations 1,2,4 and 5.

Weight:	Empty aircraft	28,300
	Fuel	Internal 15,939
		External <u>2,040</u> <u>17,979</u>
	Stores	AERO-1D      198
		4 MERS <u>856</u> <u>1,054</u>
	Total weight	47,333 lbs

Drag count: (use DRAG program)      42

Mission: Field launch, high altitude airways, field  
recovery.

Route of flight:      Distance to destination      440 nm  
Destination to alternate      70 nm

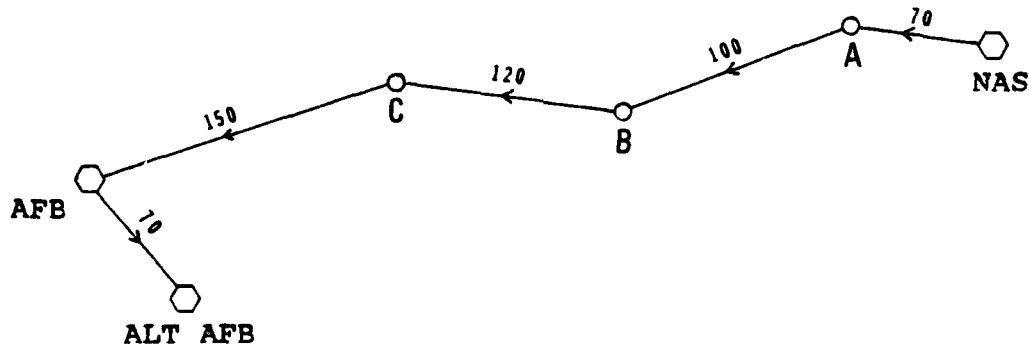

Start, Taxi and Takeoff fuel: 700 pounds

Forecast winds:	Segment	Headwind Component[kts]
	NAS to A (climb)	10
	A to B (FL350)	40
	B to C	80
	C to descent pt.	20

Segment	Headwind Component
Descent	10
AFB to ALT AFB	-10

Temperature deviation from ICAO Standard Day: 0

Plan the above mission.

IMPORTANT: Before running this program the calculator must be properly partitioned. Set SIZE 027 (see following page).

Keystrokes:	Display:	Instructions:
{XEQ}{ALPHA}SIZE{ALPHA}	SIZE---	Memory size is 027.
027	SIZE 027	
{XEQ}{ALPHA}CCD{ALPHA}	EMPTYWT?	Enter A/C empty weight in pounds.
28300{R/S}	FUELWT?	Enter total fuel weight in pounds.
17979{R/S}	STOREWT?	Enter external store weight in pounds.
1054{R/S}	DRAG?	Enter drag count.
42{R/S}	DIST?	Enter total distance in nautical miles.
440{R/S}	CLWIND?	Enter average climb headwind component in kts.
10{R/S}	DSWIND?	Enter average descent headwind component.
10{R/S}	T DEV?	Enter temperature deviation from standard in degrees Celsius.
0{R/S}	STTO?	Enter start, taxi and takeoff fuel in pounds.
700{R/S}	OPT FL349	Optimum FL - continue.
{R/S}	CRSE FL?	Enter desired cruise FL.

Keystrokes:	Display:	Instructions:
350{R/S}	CLDIST 69NM	Climb distance to FL350.
{R/S}	CLTIME 10MIN	Climb time.
{R/S}	CLFUEL=1.8	Climb fuel is 1800 lb.
{R/S}	CL AT 303KCAS	Best climb indicated A/S.
{R/S}	.7M AT FL218	Fly 0.7 mach from FL218 to FL350.
{R/S}	N CRSE LEGS?	Enter number of cruise legs.

Since the climb distance of 69 nm nearly coincides with the first check point, and the descent distance will be less than the last leg distance of 150 nm, 3 cruise legs are assumed.

3{R/S}	CRDIST 293NM	Remaining cruise distance is 293 nm - continue.
{R/S}	LEG 1 NM?	Enter the distance of the first cruise leg.
101{R/S}	LEGWIND?	Enter the forecast average headwind for leg 1.
40{R/S}	LEG M=0.73	Best range mach, leg 1.
{R/S}	TAS=421	Leg 1 TAS in knots.
{R/S}	GS=481	Leg 1 ground speed in knots.
{R/S}	TIME 16 MIN	Leg 1 elapsed time.
{R/S}	FF=3900PPH	Leg 1 fuel flow.
{R/S}	LEGFUEL=0.9	Leg 1 fuel is 900 pounds
{R/S}	FUELQTY=14.6	Fuel remaining at point B is 14,600 pounds.
{R/S}	CRDST 192NM	Remaining cruise distance.

Keystrokes:	Display:	Instructions:
{R/S}	LEG 2 NM?	Enter cruise leg 2 dist.
120{R/S}	LEGWIND?	
80{R/S}	LEG M=0.72	
{R/S}	TAS=418	
{R/S}	GS=338	
{R/S}	TIME 21MIN	
{R/S}	FF=3750PPH	
{R/S}	LEGFUEL=1.1	
{R/S}	FUELQTY=13.5	
{R/S}	CRDIST 72NM	72 nm remain to the descent point.
{R/S}	LEG 3 NM?	Final cruise leg. Same as above distance.
72{R/S}	LEGWIND?	
20{R/S}	LEG M=0.72	
{R/S}	TAS=415	
{R/S}	GS=395	
{R/S}	TIME 11MIN	
{R/S}	FF=3630PPH	
{R/S}	LEGFUEL=0.6	
{R/S}	FUELQTY=12.9	
{R/S}	DS AT 78NM	Begin descent 78 nm from destination.
{R/S}	DSTIME 16MIN	Descent time.
{R/S}	DSFUEL=0.4	Descent fuel.
{R/S}	TIME 74MIN	Total mission time.

Keystrokes:	Display:	Instructions:
{R/S}	DESTFUEL=12.5	Fuel remaining at destination.
{R/S}	ΣFUEL=5.5	Total fuel required to reach destination.
To continue to the alternate:		
{R/S}	EMPTYWT?	
28300{R/S}	FUELWT?	
12500{R/S}	STOREWT?	
1054{R/S}	DRAG?	
42{R/S}	CLWIND?	Tail wind is entered as a negative value.
10{CHS}{R/S}	DSWIND?	
10{CHS}{R/S}	T DEV?	
0{R/S}	STTO?	
0{R/S}	OPT FL370	
{R/S}	CRSE FL?	
370{R/S}	NO CRSE LEG CL TO FL159	

Due to the short distance no cruise leg is necessary. Climb to FL159 then immediately begin the descent leg.

{R/S}	CL AT 303KCAS	
{R/S}	CLTIME 4MIN	
{R/S}	CLDIST 28NM	
{R/S}	CLFUEL=1.0	
{R/S}	DSTIME 8MIN	
{R/S}	DSDIST 32NM	
{R/S}	ΣTIME 11MIN	Time to fly from destination to alternate.

Keystrokes:	Display:	Instructions:
{R/S}	DESTFUEL=11.3	Fuel at alternate.
{R/S}	ΣFUEL=1.2	Fuel to fly from destination to alternate.

#### 4. REFERENCE

A-6E/A-6E TRAM/KA-6D NATOPS Manual, Chapter 11:

Figure 11-93, Military Power Climb, Climb Speed Schedule

Figure 11-94, Military Power Climb, Time Required to Climb From Sea Level to Selected Altitude

Figure 11-95, Military Power Climb, Fuel Required to Climb From Sea Level to Selected Altitude

Figure 11-96, Military Power Climb, Distance Required to Climb From Sea Level to Selected Altitude

Figure 11-103, Maximum Range Cruise at a Constant Altitude, Time and Speed

Figure 11-107, Maximum Range Descent, Time Required to Descend From Selected Altitude to Sea Level at Idle Power

Figure 11-110, Maximum Range Descent, Fuel Required to Descend From Selected Altitude to Sea Level at Idle Power

Figure 11-111, Maximum Range Descent, Distance required to Descend From Selected Altitude to Sea Level at Idle Power.

## DRAG COUNT AND EXTERNAL STORES WEIGHT

1. PROGRAM NAME: DRAG

2. DESCRIPTION

This program computes drag counts and external stores weight for many commonly carried A-6 weapon/stores loads (listed below). Calculations may be made for mixed load and various rack configurations. The A-6 Tactical Manual and NATOPS Manual should be consulted for load and weight restrictions.

### AVAILABLE STORES LOADS

AERO-1D DROP TANK\* (-2040/empty tank weight correction)  
MK 25 Mine\* (-1171b/mine weight correction)  
MK 25 Drill Mine  
MK 52 Mine  
MK 52 Drill Mine\* (-411b/mine weight correction)  
MK 55 Mine  
MK 55 Drill Mine\* (-65 lb/mine weight correction)  
MK 56 Mine  
MK 56 Drill Mine\* (-661b/mine weight correction)  
MK 45 Parachute Flare (use for MK 24 or LUU-2B/E flare)  
MK 58 Marine Location Marker  
MK 76 Practice Bomb  
MK 81 Conical Tail  
MK 81 Snakeye  
MK 86 Practice Bomb

MK 82 Conical Tail

MK 82 Snakeye (Use for MK 36 DST and MK 124 Practice Bomb)

MK 82 Laser Guided Bomb

MK 87 Practice Bomb

MK 83 Conical Tail

MK 83 Laser Guided Bomb

MK 88 Practice Bomb

MK 84 LDGP

MK 84 Laser Guided Bomb

MK 41 DST

\*The store weight calculated by the program must be adjusted by the factor given.

### 3. PROGRAM OPERATION

a. The program operates interactively, receiving responses from the top two rows of keys.

ROW 1:	<input type="button" value="YES"/>	<input type="button" value="NO"/>	<input type="button" value="MER"/>	<input type="button" value="TER"/>	<input type="button" value="AERO"/>
ROW 2:	<input type="button" value="EMPTY"/>	<input type="button" value="V"/>	<input type="button" value="V"/>	<input type="button" value="V"/>	<input type="button" value="V"/>

The meanings of these keys are as follows. IMPORTANT: The calculator must be in the "USER" mode for the above keys to operate as defined.

Yes response

No response

A Multiple Ejector Rack (MER) is loaded on the station(s) in question.

- ☐ **TER** A Triple Ejector Rack (TER) is loaded on the station(s) in question.
- ☐ **AERO** Weapon/store will be loaded directly on the AERO-7A or AERO-7B rack.
- ☐ **EMPTY** No stores including ejector racks are to be loaded on the station(s) in question,

OR

No stores are to be loaded on the MER or TER which is loaded on the station(s) in question.

- ☐ ☐ Indicates to the program the TER load configuration or (as prompted by the program) the forward or aft MER load configuration for the station(s) in question.
- ☐ ☐

b. Symmetrical loads are assumed. That is, whatever load is on station 1 is also on station 5; and similarly with stations 2 and 4. Centerline (station 3) loads are symmetric about the station axis. Mixed loads between inboard, outboard and centerline stations are permitted.

c. For each station pair the program will inquire which store is to be loaded (i.e. "STA 1/5 STORE?"). At this time the NUMERIC part of the store name should be entered. For example, if MK 82 Snakeye bombs are to be loaded on stations 1 and 5, the user should enter "82" and depress the {R/S} button. The user will then use the top two rows of user defined keys to respond to subsequent program prompts.

d. If an unauthorized store configuration is entered a tone will sound and the message "NON-STD LOAD" will be displayed. Depress {R/S} to reinitiate the program. Be sure to check NATOPS and the Tactical Manual for further restrictions.

e. The program includes the weights of ejector racks in its weight calculations. It also makes the necessary adjustments to drag count to allow for unloaded inboard or outboard wing stations.

f. The user is asked to specify whether or not a TRAM turret is installed. If the response is "NO", 18 will be subtracted from the total drag count. This permits the possibility of a "negative" drag count for some configurations which should be taken as zero for planning purposes.

#### 4. EXAMPLE PROBLEM AND USER INSTRUCTIONS

You are to carry 12 MK 82 Snakeye loaded on MERs on stations 1 and 5. A single AERO-1D drop tank is loaded on station 3 and stations 2 and 4 are empty. Your aircraft is TRAM configured. What is your drag count and stores weight?

If using a card reader for program storage, insert the first card into the clip above the display window. It should be annotated as follows corresponding to the top two rows of keys.

YES	NO	MER	TER	AERO	(Row 1)
EMPTY					(Row 2)

It will assist you in responding to program prompts.

Keystrokes:	Display:	Instructions:
{XEQ}{ALPHA}DRAG{ALPHA}	SELECT USER	Select "user" mode if you have not already done so.
(none)	TURRET?	Enter "Yes" if TRAM.
{YES}	1/5 STORE?	Enter the numeric code of the store to be loaded on stations 1/5.
82{R/S}	MER/TER/AERO?	Enter rack type.
{MER}	(FWD)CONFIG?	For a TER (FWD) would be ignored.
{Y }	AFT CONFIG?	
{Y }	LGB?	Laser Guided Bomb?
{NO}	SNAKEYE?	
{YES}	2/4 STORE?	
{EMPTY}	3 STORE?	Enter the code for an AERO-1D drop tank.
1{R/S}	MER/TER/AERO	
{AERO}	1/5 DRAG=56	0.7 X 80 = 56 (stations 2 and 4 are empty).
{R/S}	2/4 DRAG=0	
{R/S}	3 DRAG=10	
{R/S}	TOT DRAG=66	
{R/S}	STORES WT=9530	
{R/S}	SELECT USER	Reinitializes program.

# 5. REFERENCE

A-6E/A-6E TRAM/KA-6D NATOPS Manual, pp. 11-114-5, FO-17.

## LANDING AND APPROACH SPEEDS

### 1. PROGRAM NAME: LAA

### 2. PROGRAM DESCRIPTION

This program computes the power approach stall speed ( $V_s$ ), stall warning speed, minimum landing distance approach speed and optimum approach speed for the A-6E, A-6E TRAM and KA-6D aircraft. The user inputs aircraft gross weight in thousands of pounds and also indicates to the program whether or not external stores are carried. The program assumes takeoff flaps ( $30^\circ$ ), gear down and wing tip speed brakes extended.

### 3. EQUATIONS

$$V_s = 48.25 + 1.375W$$

$$V_{sw} = 1.09V_s$$

$$V_{mld} = 1.18V_s$$

$$V_{app} = 1.28V_s$$

Where  $V_s$  = power approach stall speed

$W$  = gross weight [lbs/1000]

$V_{sw}$  = stall warning speed

$V_{mld}$  = minimum landing distance approach speed

$V_{app}$  = optimum approach speed.

### 4. EXAMPLE PROBLEM AND USER INSTRUCTIONS

Compute power approach stall speed, stall warning speed, minimum landing distance approach speed and optimum

approach speed for a 36,000 pound aircraft with drop tanks and MERs.

{XEQ}{ALPHA}LAA{ALPHA}	GW/1000?	Enter gross weight in thousands of pounds.
36{R/S}	STORES? A=NO	If no external stores are loaded press {A}. If stores are loaded press {R/S}.
{R/S}	VSTALL=98	Power approach stall speed [KIAS].
{R/S}	VWRNG=107	Stall warning speed.
{R/S}	VMINAPP=115	Minimum landing distance approach speed.
{R/S}	VOPTAPP=125	Optimum approach speed.
{R/S}	GW/1000?	Reinitializes program.

#### REFERENCE

A-6E/A-6E TRAM/KA-6D NATOPS Manual, p. 11-62, Fig. 11-51,  
Landing and Approach Speeds.

# MAXIMUM REFUSAL SPEED (SINGLE ENGINE)

## 1. PROGRAM NAME: RS

## 2. PROGRAM DESCRIPTION

This program computes maximum refusal speed which is the maximum takeoff engine failure speed at which the aircraft can be brought to a stop at the end of the runway. Use of antiskid braking and flaperon pop-up are assumed. Input are aircraft gross weight in thousands of pounds, local pressure altitude in feet, temperature in degrees Fahrenheit, actual runway length in feet, headwind or tailwind component in knots and runway slope gradient in degrees.

## 3. EXAMPLE PROBLEM AND USER INSTRUCTIONS

Compute refusal speed for a 46,000 pound aircraft on a 4400 foot runway with a pressure altitude of 2600 feet, a surface temperature of 77 degrees Fahrenheit, a 10 knot headwind and a positive runway slope gradient of 1 percent.

Keystrokes:	Display:	Instructions:
{XEQ}{ALPHA}RS{ALPHA}	GW/1000?	Enter gross weight in thousands of pounds.
46{R/S}	P.ALT: FT?	Enter pressure altitude in feet.
2600{R/S}	TEMP: F?	Enter temperature in degrees Fahrenheit.
77{R/S}	RWY LT: FT?	Enter runway length.

Keystrokes:	Display:	Instructions:
4400{R/S}	+HW/-TW: KTS?	Enter Headwind or tailwind in knots, headwind positive/tailwind negative.
10{R/S}	RWY GRAD?	Enter runway slope gradient in percent.
1{R/S}	REFSPD: 110	Refusal speed in knots.
{R/S}	GW/1000?	Reinitializes program.

#### REFERENCE

A-6E/A-6E TRAM/KA-6D NATOPS Manual, p. 11-18, Fig 11-11, Maximum Refusal Speeds.

# TANKER MISSION PROFILE - KA-6D

## 1. PROGRAM NAME: TANK

## 2. PROGRAM DESCRIPTION

This program computes, for the KA-6D Tanker, the amount of give away fuel available based on current fuel onboard, time until recovery and holding profile. The computed value allows the aircraft to leave holding at recovery time with approximately 5000 pounds of fuel remaining. Two holding profiles may be selected: a) low holding at 2000 feet, 210 KCAS or b) high holding at 15,000 feet, 210 KCAS.

## 3. EXAMPLE PROBLEM AND USER INSTRUCTIONS

You have 20,000 pounds of fuel onboard and one hour until recovery. For a 15,000 foot holding pattern, what is your give away fuel.

Keystrokes:	Display:	Instructions:
[XEQ][ALPHA]TANK[ALPHA]	FUEL ONBD/1000?	Enter fuel onboard.
20[R/S]	HRS TO REC?	Enter hours until recovery.
1[R/S]	A=LOW,B=HIGH	Press {A} for low holding, {B} for high holding.
{B}	GIVEAWAY:10.9	
[R/S]	FUEL ONBD/1000?	Reinitializes program.

4. REFERENCE

NAVAIR 01-85ADF-1B, NATOPS Pocket Checklist A-6E/A-6E TRAM/  
KA-6D [Ref. 3], p. 82, Tanker Mission Profile - KA-6D.

## NORMAL TAKEOFF DISTANCE AND LINE SPEED CHECK

### 1. PROGRAM NAME: TO

### 2. PROGRAM DESCRIPTION

This program calculates takeoff ground roll distance in feet and lift-off equivalent airspeed (EAS) in knots. Inputs are takeoff gross weight in thousands of pounds, runway temperature in degrees Fahrenheit, runway pressure altitude in feet, headwind component in knots and runway slope gradient in percent. All external store configurations are valid. The program also computes line speed at any point along the takeoff ground roll up to 5000 feet when given this distance in feet. Warnings are provided for situations where excessive ground roll would result in marginal or unsafe conditions.

### 3. EXAMPLE PROBLEM AND USER INSTRUCTIONS

Takeoff gross weight: 45,000 pounds

Runway Temperature: 80 Degrees Fahrenheit

Runway pressure altitude: 3000 feet

Headwind component: 20 knots

Runway slope gradient: 2 percent

Find takeoff distance, liftoff speed, speed at 2000 feet and speed at 3000 feet.

Keystrokes:

Display:

Instructions:

{XEQ}{ALPHA}TO{ALPHA}

GW/1000?

Enter gross weight in thousands of pounds.

Keystrokes:	Display:	Instructions:
45{R/S}	TEMP?: DEG F	Enter runway temperature.
80{R/S}	PRES ALT?: FT	Enter runway pressure altitude.
3000{R/S}	WIND?: KTS	Enter positive headwind or negative tailwind.
20{R/S}	GRADIENT?: %	Enter runway slope gradient.
2{R/S}	T/O DIST=3380	Take-off distance in feet.
{R/S}	CK DIST?: FT	Enter linespeed distance in feet.
2000{R/S}	L/S=108 KIAS	Line speed at 2000 ft.
{R/S}	CK DIST?: FT	
3000{R/S}	L/S=131 KIAS	Line speed at 3000 ft.

#### 4. REFERENCE

A-6E/A-6E TRAM/KA-6D NATOPS Manual, p. 11-19, Fig. 11-12,  
Normal Take-off Distance and Line Speed Check.

# CROSSWIND TAKEOFF/LANDING

## 1. PROGRAM NAME: XWL

## 2. PROGRAM DESCRIPTION

This program computes cross-wind and headwind components as well as nose-wheel touchdown/liftoff true airspeeds when given runway heading in degrees, wind velocity in knots and wind direction in degrees. Landing is recommended or not recommended based on the maximum sideslip angle of the aircraft using maximum rudder deflection.

## 3. EXAMPLE PROBLEM AND USER INSTRUCTIONS

You are on an approach to runway 23. Tower advises surface winds are 280/30. Should an arrested landing be made?

Keystrokes:	Display:	Instructions:
{XEQ}{ALPHA}XWL{ALPHA}	RWY HDG?	Enter runway heading in degrees.
230{R/S}	WIND DIR?	Enter wind direction in degrees.
280{R/S}	WIND VEL?	Enter wind velocity in knots.
30{R/S}	RECOMMENDED	A field landing can be made.
{R/S}	MIN TAS=90	Minimum nose-wheel touchdown speed.
Note: For takeoff this minimum overrides computed takeoff speed.		
{R/S}	HW=19	Headwind component.

Keystrokes:	Display:	Instructions:
{R/S}	XW=23	Crosswind component.
{R/S}	RWY HDG?	Reinitializes program.

#### REFERENCE


A-6E/A-6E TRAM/KA-6D NATOPS Manual, p. 11-12, Fig. 11-9,  
Take-off/Landing Crosswind Chart.

## APPENDIX

This Appendix contains detailed documentation of each NCAPPS program. This includes the following:

1. EQUATIONS. This section lists the equations used to model the NATOPS performance data. In most cases these are the result of computer generated multiple linear regressions of transformed powers and cross products of the independent variables. In some cases more simple power curves or even linear fits were obtained. Each dependent and independent variable is defined in terms of the units used by the program.


2. FLOWCHARTS. This section contains flowcharts which depict the logic sequence and computational steps used by the programs. The following symbols are used:



Entry/exit block. Indicates the start or end of the program or a return to the main program from a subroutine.



Process block. Indicates a calculation, data storage or retrieval, input, output or prompt. These operations may be combined in a single block for brevity.



Decision block. Indicates a decision between one of two options.



Branch input. Control is transferred from another part of the program to this point.



Offpage connector. Continuation of a branch from the previous page.



Subroutine execution.

3. PROGRAMS AND SUBROUTINES USED. This section lists the names and a brief description of any subroutines used by the main program.

4. FLAGS, DATA STORAGE REGISTERS AND PROGRAM STORAGE REQUIREMENTS. This section lists any flags used by the program and indicates their purpose. It also lists data storage size and the variables or constants assigned to each data storage register. Lastly, the number of registers and bytes required to store the program are given.

5. PROGRAM LISTINGS. This section contains a listing of each line of the program and its appended subroutines.

ASYM - ASYMETRIC EXTERNAL STORE LOADING  
CATAPULT AND ARREST LIMITATIONS

1. EQUATIONS

Wing moment:

$$\begin{aligned} & (\text{STA 5 load} - \text{STA 1 load})11.75 \\ & + (\text{STA 4 load} - \text{STA 2 load})7.9 \leq \pm 21,150 \text{ ft-lb} \end{aligned}$$

2. FLOWCHART

See following page.

3. PROGRAMS AND SUBROUTINES USED

None.

4. FLAGS, DATA STORAGE REGISTERS AND PROGRAM STORAGE  
REQUIREMENTS.


a. Flags used: none.

b. Data storage registers.

Register:	Contents:
R01	Station 1 load in pounds
R02	Station 2 load in pounds
R04	Station 4 load in pounds
R05	Station 5 load in pounds

c. Program storage requirement is 20 registers, 139 bytes.

# ASYM

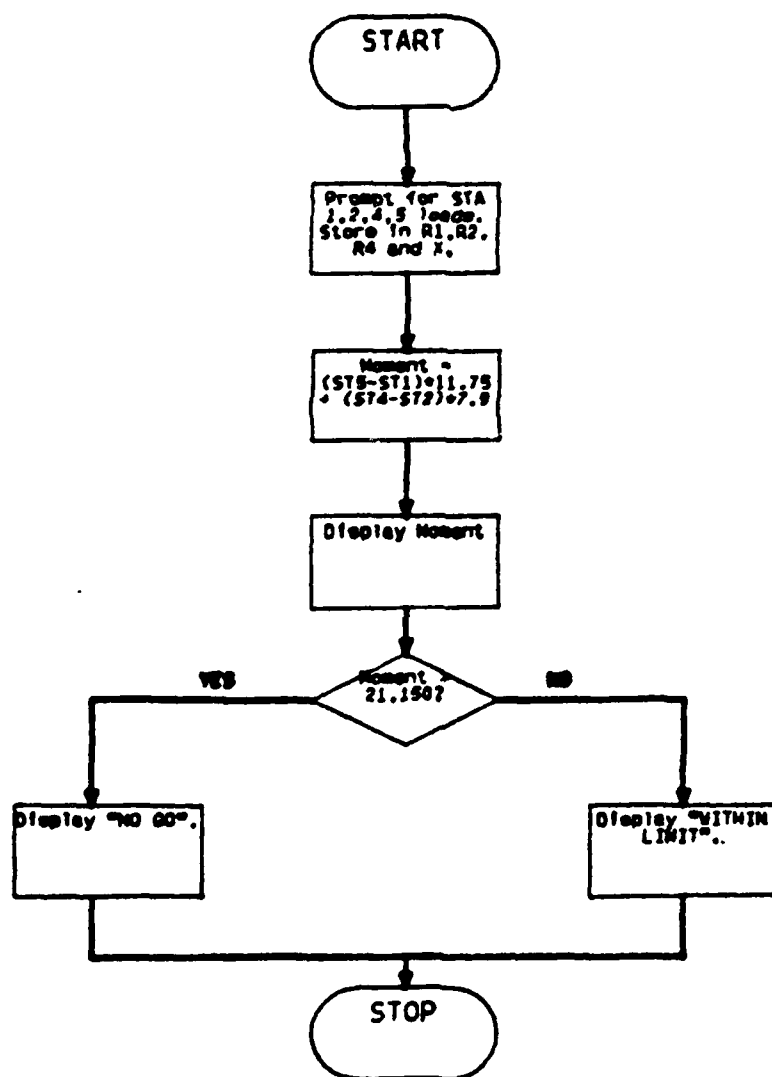

# 5. PROGRAM LISTING

```

01♦LBL "ASY
M"
02 FIX 0
03 "STA 1 L
OAD?"
04 PROMPT
05 STO 01
06 "STA 2 L
OAD?"
07 PROMPT
08 STO 02
09 "STA 4 L
OAD?"
10 PROMPT
11 STO 04
12 "STA 5 L
OAD?"
13 PROMPT
14 RCL 01
15 -
16 11.75
17 *
18 RCL 04
19 RCL 02
20 -
21 7.9
22 *
23 +
24 "MOMENT=
"
25 ARCL X
26 AON
27 PSE
28 AOFF
29 ABS
30 21150
31 -
32 X<0?
33 GTO 01
34 "NO GO"
35 AVIEW
36 STOP
37 GTO "ASY
M"
38♦LBL 01

```

```

39 "WITHIN
LIMIT"
40 AVIEW
41 END

```

# CCD - MAXIMUM RANGE CLIMB, CRUISE AND DESCENT PROFILE

## 1. EQUATIONS

### a. Optimum cruise altitude [feet/1000].

$$A = 55.27 - 0.4310W - 2.772 \times 10^{-6} D^2 W$$

### b. Time required to climb to optimum altitude from sea level [minutes].

$$t_c = \exp(-0.0569 + 3.76 \times 10^{-3} D - 0.0385W + 6.27 \times 10^{-3} WA - 1.59 \times 10^{-5} W^2 A - 9.87 \times 10^{-5} A^2 W - 1.86 \times 10^{-8} D^3 + 1.56 \times 10^{-5} A^3)$$

### c. Time required to climb to optimum altitude from sea level corrected for deviation of temperature from standard in degrees Celsius [minutes].

$$t'_c = 1.41 + 0.500t_c - 4.42 \times 10^{-3} E^2 + 3.30 \times 10^{-2} t_c^2 + 1.45 \times 10^{-3} E^2 t_c + 2.68 \times 10^{-3} E t_c^2 + 1.23 \times 10^{-4} E^3$$

### d. Distance required to climb to optimum altitude from sea level [nautical miles].

$$L_c = \exp(7.65 + 6.63 \times 10^{-3} D - 0.111W - 0.0483A + 4.32 \times 10^{-5} W^2 A - 1.81 \times 10^{-6} A^2 D - 4.69 \times 10^{-8} D^3)$$

### e. Distance required to climb to optimum altitude from sea level corrected for deviation of temperature from standard in degrees Celsius [nautical miles].

$$L'_c = -1.88 - 0.956E + 1.03L_c + 0.0441EL_c + 9.82 \times 10^{-4} E^2 L_c + 8.65 \times 10^{-4} E^3$$

### f. Fuel required to climb to optimum altitude from sea level [pounds/100].

$$F_C = 7.94 - 0.07D + 8.73 \times 10^{-5} AW^2 + 8.69 \times 10^{-5} ADW$$

g. Fuel required to climb to optimum altitude from sea level corrected for deviation of temperature from standard in degrees Celsius [pounds].

$$F'_C = -2.99 - 4.76E + 96.7F_C + 0.954EF_C + 0.0295E^2F_C \\ + 0.0392EF_C^2 + 0.0129E^3 + 0.0143F_C^3$$

h. Best range mach number at optimum altitude.

$$M = 0.345 + 3.00 \times 10^{-3} W - 2.48 \times 10^{-5} AD + 3.67 \times 10^{-7} A^2 D \\ + 8.48 \times 10^{-6} A^2 W - 2.28 \times 10^{-9} A^3 W^2 + 2.27 \times 10^{-10} AD^2 W$$

i. Pounds of fuel per nautical mile at optimum altitude [pounds/nm].

$$F = 25.7 - 0.509A + 6.13 \times 10^{-4} DW - 2.42 \times 10^{-2} WA \\ + 1.69 \times 10^{-4} W^2 A + 4.81 \times 10^{-4} A^2 W$$

j. True airspeed corrected for temperature deviation in degrees Celsius from standard [knots].

$$TAS = 29.06 MT^{0.5}$$

$$T = \begin{aligned} &518.7 - 3.566A + 1.8E, \quad (0 \leq A \leq 36) \\ &390 + 1.8E, \quad (A > 36) \end{aligned}$$

k. Best climb speed to optimum altitude [KCAS].

$$V_C = 320 - 0.4D$$

l. Climb flight level at which to intercept 0.7 mach.

$$A_X = 19.7 \exp(0.00239D)$$

m. Time required to descend (best range) from optimum altitude to sea level [minutes].

$$t_d = 7.13 + A^3 (2.35 \times 10^{-4} + 4.05 \times 10^{-12} D^3 - 1.68 \times 10^{-8} DW)$$


n. Distance required to descend from optimum altitude to sea level [nautical miles].

$$L_d = -31.0 + 3.59A - 8.94 \times 10^{-4} ADW - 1.67 \times 10^{-4} A^2 DW + 1.51 \times 10^{-4} A^2 DW - t_d V_W$$

o. Fuel required to descend from any altitude to sea level. [pounds/1000].

$$F_d = 0.049 \exp(-1.63 \times 10^{-3} D) [0.723 A^{0.715} - (0.03 + 0.002A)(W - 30)]$$

p. Peak altitude for profiles too short to contain cruise segments (after Campbell and Champney)[Ref. 4].

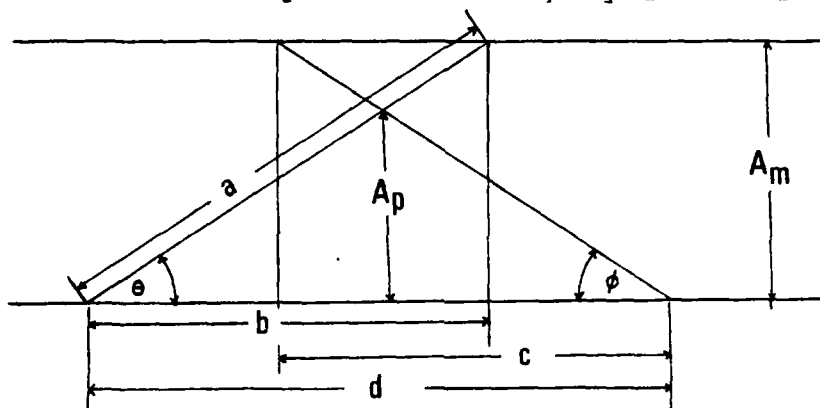

b = climb distance [NM]

c = descent distance [NM]

d = total mission distance [NM]

A<sub>p</sub> = peak altitude [ft/1000]

A<sub>m</sub> = optimum altitude = A/6076 [ft/1000/6076]

θ = arctan(A<sub>m</sub>/b)

φ = arctan(A<sub>m</sub>/c)

a = (d sin φ) / sin(180 - θ - φ)

A<sub>p</sub> = (6076 d sin φ sin θ) / sin(180 - θ - φ)

VARIABLES:

$A$  = optimum cruise altitude [ft/1000]

$A_m$  = optimum altitude [ft/1000]

$A_p$  = peak altitude [ft/1000]

$A_x$  = flight level at which mach = 0.7 is intercepted during climb.

$D$  = drag count

$E$  = deviation of temperature from ICAO standard [degrees Celsius]

$F$  = pounds of fuel per nautical mile at cruise altitude [pounds/NM]

$F_c$  = fuel required to climb to optimum altitude from sea level [pounds/100]

$F_d$  = Fuel required to descend to sea level [pounds]

$L_c$  = Distance required to climb to optimum altitude from sea level [nautical miles]

$L'_c$  =  $L$  corrected for temperature deviation [nm]

$M$  = best range mach number

$T$  = absolute temperature [degrees Rankine]

$TAS$  = true airspeed [knots]

$t_c$  = time to climb to optimum altitude from sea level [min]

$t'_c$  =  $t$  corrected for temperature deviation [min]

$t_d$  = time to descend from optimum altitude to sea level [min]

$V_w$  = headwind component [KCAS]

$V_c$  = climb airspeed [KCAS]

$W$  = aircraft gross weight [pounds/1000]

### 3. PROGRAMS AND SUBROUTINES USED

- "CL" - Computes climb time, fuel and distance.
- "CS" - Computes climb speed and altitude to intercept mach 0.7.
- "DF" - Computes fuel used during descent.
- "DS" - Computes descent time and distance.

### 4. FLAGS, DATA STORAGE REGISTERS AND PROGRAM STORAGE REQUIREMENTS.


- a. Flags used: none.
- b. Data Storage Registers.


Register:	Contents:
R00	Aircraft gross weight (W)
R01	Initial fuel weight
R02	Fuel weight
R03	Descent fuel ( $F_d$ )
R04	Drag count (D)
R05	Total distance
R06	Climb wind
	0.7 mach intercept altitude
	Cruise leg counter
	Temporary gross weight
R07	Cruise wind ( $V_W$ )
R08	Descent wind
	Remaining cruise distance
R09	Temperature deviation (E)
R09	$\theta$


Register:	Contents:
R10	Optimum/cruise/peak altitude (A)
R11	Total time
R12	Climb distance ( $b, L_c, L'_c$ )
R13	descent distance ( $c, L_d$ )
R14	$W^2 A$ Cruise leg DSE counter
R15	$A^2 D$
R16	$D^3$
R17	$E^3$
R18	WA Average leg gross weight
R19	$A^2 W$
R20	$A^3$
R21	Leg distance
R22	Descent time ( $t_d$ )
R23	Cruise specific fuel rate (F)
R24	Best range mach number (M) TAS
R25	Climb time ( $t_c, t'_c$ )
R26	Climb fuel ( $F_c, F'_c$ )


c. Program storage requirement is 236 registers, 1652 bytes.

CCD

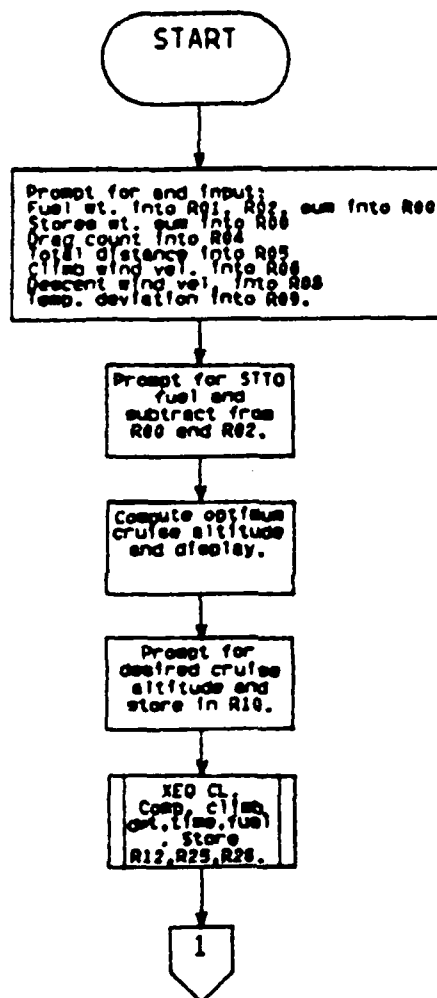

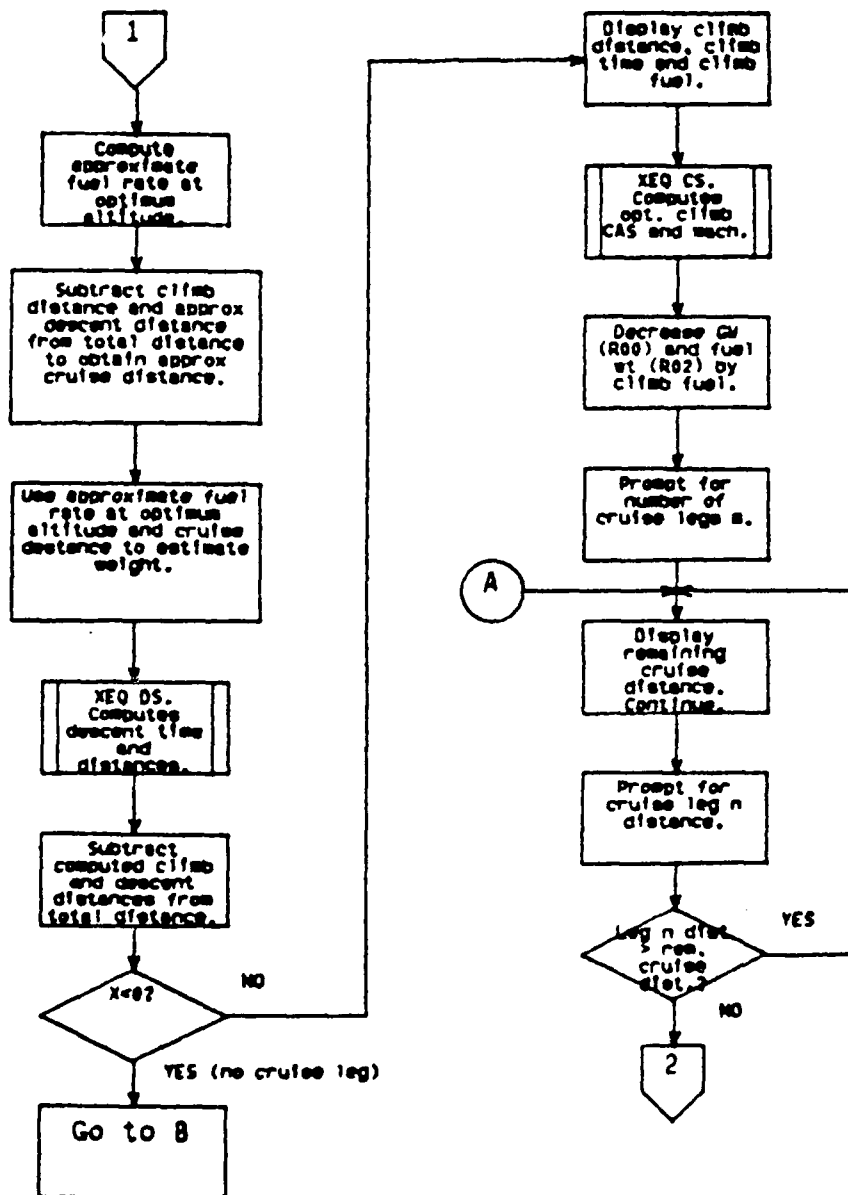

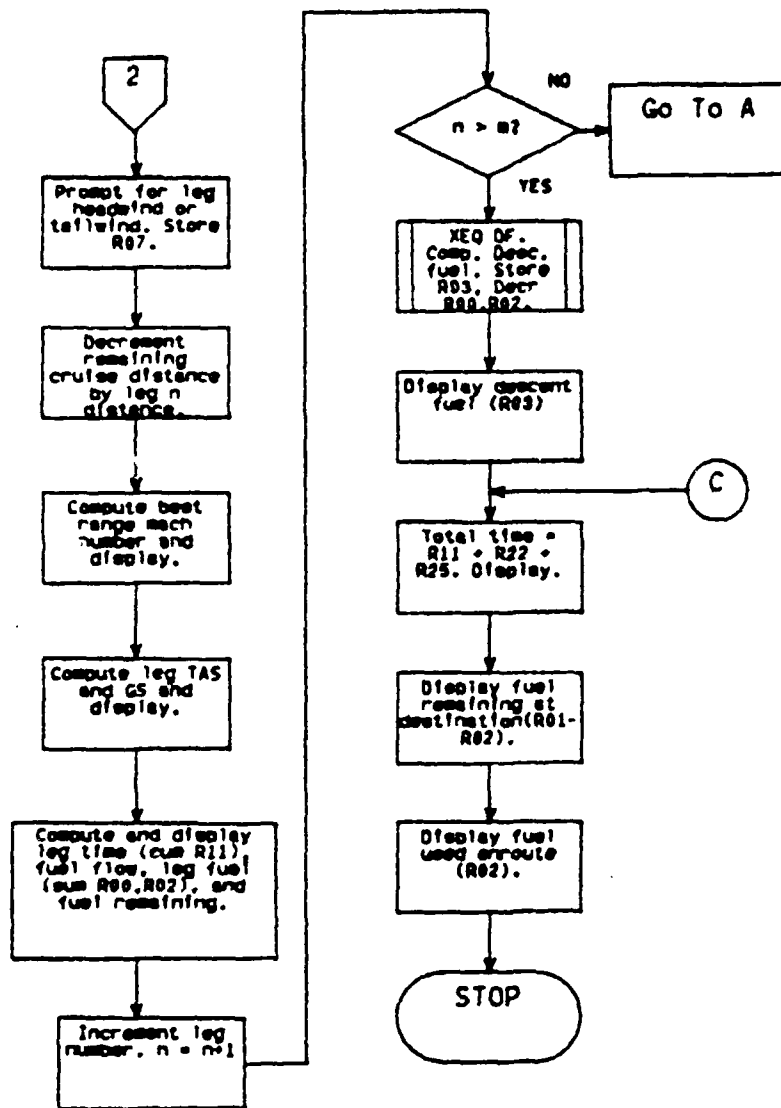

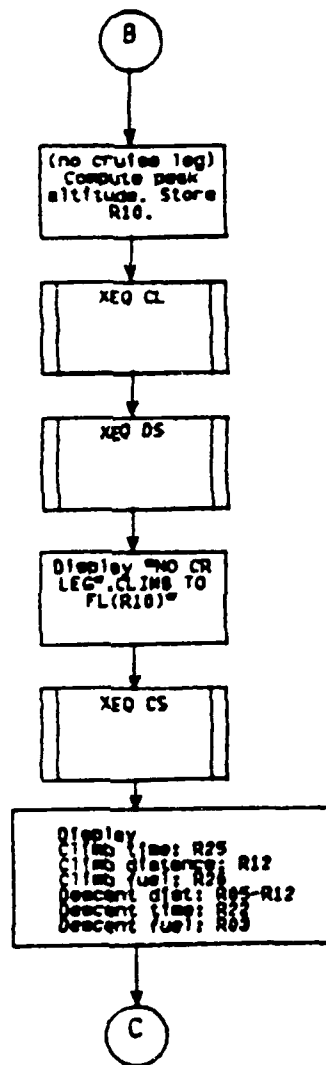

# 5. PROGRAM LISTING

01♦LBL "CCD	42 *
"	43 -
02 FIX 0	44 RCL 00
03 0	45 RCL 04
04 "EMPTYWT	46 X↑2
?"	47 *
05 PROMPT	48 2772 E-9
06 STO 00	49 *
07 "FUELWT?	50 -
"	51 STO 10
08 PROMPT	52 10
09 ST+ 00	53 *
10 STO 01	54 "OPT FL"
11 STO 02	55 ARCL X
12 "STOREWT	56 PROMPT
?"	57 "CRSE FL
13 PROMPT	?"
14 ST+ 00	58 PROMPT
15 "DRAG?"	59 10
16 PROMPT	60 /
17 STO 04	61 STO 10
18 "DIST?"	62 XEQ "CL"
19 PROMPT	63 ST- 06
20 STO 05	64 25.7
21 "CLWIND?	65 ENTER↑
"	66 RCL 10
22 PROMPT	67 .51
23 STO 06	68 *
24 "DSWIND?	69 -
"	70 RCL 04
25 PROMPT	71 RCL 00
26 STO 08	72 *
27 "T DEV?"	73 613 E-6
28 PROMPT	74 *
29 STO 09	75 +
30 "STTO?"	76 RCL 18
31 PROMPT	77 242 E-4
32 ST- 02	78 *
33 ST- 00	79 -
34 1000	80 RCL 14
35 ST/ 00	81 169 E-6
36 ST/ 01	82 *
37 ST/ 02	83 +
38 55.27	84 RCL 19
39 ENTER↑	85 481 E-6
40 RCL 00	86 *
41 .431	87 +

```

88 STO 23
89 RCL 05
90 RCL 12
91 -
92 80
93 -
94 X<0?
95 CLX
96 *
97 1000
98 /
99 ST- 06
100 RCL 00
101 ST+ 06
102 XEQ "DS"
103 CHS
104 RCL 05
105 +
106 RCL 12
107 -
108 X<0?
109 GTO 10
110 STO 08
111 BEEP
112 "CLDIST
"
113 ARCL 12
114 "FNM"
115 PROMPT
116 "CLTIME
"
117 ARCL 25
118 "FMIN"
119 PROMPT
120 FIX 1
121 "CLFUEL
"
122 ARCL 26
123 PROMPT
124 XEQ "CS"
125 RCL 26
126 ST- 00
127 ST- 02
128 1
129 STO 06
130 "N CR LE
GS?"
131 PROMPT
132 STO 14
133 LBL 30
134 FIX 0

```

```

135 RCL 08
136 RND
137 "CRDIST
"
138 ARCL X
139 "FNM"
140 PROMPT
141 "LEG "
142 ARCL 06
143 "F NM?"
144 PROMPT
145 STO 21
146 -
147 X<0?
148 GTO 30
149 "LEGWIND
?"
150 PROMPT
151 STO 07
152 RCL 00
153 STO 18
154 RCL 21
155 ST- 08
156 5 E-4
157 *
158 RCL 23
159 *
160 ST- 18
161 RCL 18
162 3 E-3
163 *
164 RCL 10
165 RCL 04
166 *
167 248 E-7
168 *
169 -
170 .345
171 +
172 RCL 15
173 367 E-9
174 *
175 +
176 RCL 10
177 X↑2
178 RCL 18
179 *
180 STO 19
181 848 E-8
182 *
183 +

```

```

184 RCL 20
185 RCL 18
186 X↑2
187 *
188 228 E-11
189 *
190 -
191 RCL 10
192 RCL 04
193 X↑2
194 *
195 RCL 18
196 *
197 227 E-12
198 *
199 +
200 STO 24
201 FIX 2
202 "LEG M="
203 ARCL X
204 PROMPT
205 RCL 10
206 36
207 -
208 X>0?
209 GT0 35
210 36
211 +
212 CHS
213 3.566
214 *
215 518.7
216 +
217 GT0 36
218♦LBL 35
219 390
220 ENTER↑
221♦LBL 36
222 RCL 09
223 1.8
224 *
225 +
226 SQRT
227 29.06
228 *
229 RCL 24
230 *
231 STO 24
232 FIX 0
233 "TAS="
234 ARCL X

```

```

235 PROMPT
236 RCL 07
237 -
238 "GS="
239 ARCL X
240 PROMPT
241 1/X
242 60
243 *
244 RCL 21
245 *
246 ST+ 11
247 "TIME "
248 ARCL X
249 "FMIN"
250 PROMPT
251 RCL 04
252 RCL 18
253 *
254 613 E-6
255 *
256 RCL 10
257 .5091
258 *
259 -
260 25.67
261 +
262 RCL 18
263 RCL 10
264 *
265 2418 E-5
266 *
267 -
268 RCL 18
269 X↑2
270 RCL 10
271 *
272 1693 E-7
273 *
274 +
275 RCL 19
276 4814 E-7
277 *
278 +
279 RCL 24
280 *
281 10
282 /
283 RND
284 10
285 *

```

```

286 "FF="
287 ARCL X
288 "LPPH"
289 PROMPT
290 RCL 24
291 /
292 RCL 21
293 *
294 1000
295 /
296 ST- 00
297 ST- 02
298 FIX 1
299 "LEGFUEL
="
300 ARCL X
301 PROMPT
302 "FUELQTY
="
303 ARCL 02
304 PROMPT
305 1
306 ST+ 06
307 DSE 14
308 GTO 30
309 FIX 0
310 "DS AT "
311 ARCL 13
312 "FNM"
313 PROMPT
314 "DSTIME
"
315 ARCL 22
316 "FMIN"
317 PROMPT
318 XEQ "DF"
319 "DSFUEL=
"
320 ARCL X
321 PROMPT
322 GTO 50
323 LBL 10
324 RAD
325 RCL 10
326 6076
327 /
328 RCL 12
329 /
330 ATAN
331 STO 09
332 SIN

```

```

333 RCL 10
334 6076
335 /
336 RCL 13
337 /
338 ATAN
339 ST+ 09
340 SIN
341 *
342 6076
343 *
344 RCL 05
345 *
346 PI
347 ENTER↑
348 RCL 09
349 -
350 SIN
351 /
352 STO 10
353 XEQ "CL"
354 ST- 02
355 CHS
356 RCL 00
357 +
358 STO 06
359 XEQ "DS"
360 XEQ "DF"
361 BEEP
362 "NO CR L
EG"
363 AVIEW
364 PSE
365 RCL 10
366 10
367 *
368 FIX 0
369 "CL TO F
L"
370 ARCL X
371 PROMPT
372 XEQ "CS"
373 "CLTIME
"
374 ARCL 25
375 "FMIN"
376 PROMPT
377 RCL 12
378 ST- 05
379 "CLDIST
"

```

380 ARCL X  
 381 "FNM"  
 382 PROMPT  
 383 FIX 1  
 384 "CLFUEL"  
 "  
 385 ARCL 26  
 386 PROMPT  
 387 FIX 0  
 388 "DSTIME"  
 "  
 389 ARCL 22  
 390 "FMIN"  
 391 PROMPT  
 392 "DSDIST"  
 "  
 393 ARCL 05  
 394 "FNM"  
 395 PROMPT  
 396 FIX 1  
 397 "DSFUEL"  
 "  
 398 ARCL 03  
 399 PROMPT  
 400 LBL 50  
 401 FIX 0  
 402 "ΣTIME -"  
 403 ARCL 11  
 404 "FMIN"  
 405 PROMPT  
 406 FIX 1  
 407 RCL 01  
 408 RCL 02  
 409 "DESTFUE"  
 L "  
 410 ARCL X  
 411 PROMPT  
 412 -  
 413 "ΣFUEL=" "  
 414 ARCL X  
 415 PROMPT  
 416 GTO "CCD"  
 "  
 417 RTN  
 418 LBL "CL"  
 419 RCL 00  
 420 X↑2  
 421 \*  
 422 STO 14  
 423 432 E-7  
 424 \*

425 7.65  
 426 +  
 427 RCL 04  
 428 663 E-5  
 429 \*  
 430 +  
 431 RCL 00  
 432 .111  
 433 \*  
 434 -  
 435 RCL 10  
 436 483 E-4  
 437 \*  
 438 -  
 439 RCL 10  
 440 X↑2  
 441 RCL 04  
 442 \*  
 443 STO 15  
 444 181 E-8  
 445 \*  
 446 -  
 447 RCL 04  
 448 3  
 449 Y↑X  
 450 STO 16  
 451 469 E-10  
 452 \*  
 453 -  
 454 E↑X  
 455 STO 12  
 456 1.03  
 457 \*  
 458 1.88  
 459 -  
 460 RCL 09  
 461 .956  
 462 \*  
 463 -  
 464 RCL 09  
 465 RCL 12  
 466 \*  
 467 441 E-4  
 468 \*  
 469 +  
 470 RCL 09  
 471 X↑2  
 472 RCL 12  
 473 \*  
 474 982 E-6  
 475 \*

476 +  
 477 RCL 09  
 478 3  
 479 Y↑X  
 480 865 E-6  
 481 \*  
 482 +  
 483 STO 12  
 484 RCL 04  
 485 376 E-5  
 486 \*  
 487 569 E-4  
 488 -  
 489 RCL 00  
 490 385 E-4  
 491 \*  
 492 -  
 493 RCL 00  
 494 RCL 10  
 495 \*  
 496 STO 18  
 497 627 E-5  
 498 \*  
 499 +  
 500 RCL 14  
 501 159 E-7  
 502 \*  
 503 -  
 504 RCL 10  
 505 X↑2  
 506 RCL 00  
 507 \*  
 508 STO 19  
 509 987 E-7  
 510 \*  
 511 -  
 512 RCL 16  
 513 186 E-10  
 514 \*  
 515 -  
 516 RCL 10  
 517 3  
 518 Y↑X  
 519 STO 20  
 520 156 E-7  
 521 \*  
 522 +  
 523 E↑X  
 524 STO 25  
 525 .5  
 526 \*

527 1.405  
 528 +  
 529 RCL 09  
 530 X↑2  
 531 442 E-5  
 532 \*  
 533 -  
 534 RCL 25  
 535 X↑2  
 536 33 E-3  
 537 \*  
 538 +  
 539 RCL 09  
 540 X↑2  
 541 RCL 25  
 542 \*  
 543 145 E-5  
 544 \*  
 545 +  
 546 RCL 09  
 547 RCL 25  
 548 X↑2  
 549 \*  
 550 268 E-5  
 551 \*  
 552 +  
 553 RCL 17  
 554 123 E-6  
 555 \*  
 556 +  
 557 STO 25  
 558 STO 11  
 559 60  
 560 /  
 561 RCL 06  
 562 \*  
 563 ST- 12  
 564 7.94  
 565 ENTER↑  
 566 RCL 04  
 567 .07  
 568 \*  
 569 -  
 570 RCL 10  
 571 RCL 00  
 572 X↑2  
 573 \*  
 574 873 E-7  
 575 \*  
 576 +  
 577 RCL 10

578 RCL 04  
 579 \*  
 580 RCL 00  
 581 \*  
 582 869 E-7  
 583 \*  
 584 +  
 585 STO 26  
 586 96.7  
 587 \*  
 588 RCL 09  
 589 4.76  
 590 \*  
 591 -  
 592 3  
 593 -  
 594 RCL 09  
 595 RCL 26  
 596 \*  
 597 .954  
 598 \*  
 599 +  
 600 RCL 09  
 601 X↑2  
 602 RCL 26  
 603 \*  
 604 295 E-4  
 605 \*  
 606 +  
 607 RCL 09  
 608 RCL 26  
 609 X↑2  
 610 \*  
 611 392 E-4  
 612 \*  
 613 +  
 614 RCL 17  
 615 129 E-4  
 616 \*  
 617 +  
 618 RCL 26  
 619 3  
 620 Y↑X  
 621 144 E-4  
 622 \*  
 623 +  
 624 1000  
 625 /  
 626 STO 26  
 627 RTN  
 628 LBL "DS"

629 RCL 16  
 630 405 E-14  
 631 \*  
 632 RCL 04  
 633 RCL 06  
 634 \*  
 635 168 E-10  
 636 \*  
 637 -  
 638 235 E-6  
 639 +  
 640 RCL 20  
 641 \*  
 642 7.13  
 643 +  
 644 STO 22  
 645 ST+ 11  
 646 RCL 10  
 647 3.59  
 648 \*  
 649 31  
 650 -  
 651 RCL 16  
 652 RCL 10  
 653 \*  
 654 RCL 06  
 655 \*  
 656 894 E-12  
 657 \*  
 658 -  
 659 RCL 20  
 660 RCL 04  
 661 \*  
 662 RCL 06  
 663 \*  
 664 167 E-9  
 665 \*  
 666 -  
 667 RCL 15  
 668 RCL 04  
 669 \*  
 670 RCL 06  
 671 \*  
 672 151 E-10  
 673 \*  
 674 +  
 675 RCL 22  
 676 RCL 08  
 677 \*  
 678 60  
 679 /

680 -  
681 STO 13  
682 RTN  
683♦LBL "CS"  
684 RCL 04  
685 .4  
686 \*  
687 CHS  
688 320  
689 +  
690 FIX 0  
691 "CL AT"  
692 ARCL X  
693 "FKCAS"  
694 PROMPT  
695 RCL 04  
696 239 E-5  
697 \*  
698 E↑X  
699 19.7  
700 \*  
701 STO 06  
702 RCL 10  
703 -  
704 X>0?  
705 RTN  
706 10  
707 ST\* 06  
708 ".7M AT  
FL"  
709 ARCL 06  
710 PROMPT  
711 RTN  
712♦LBL "DF"  
713 RCL 10  
714 FIX 1  
715 .002  
716 \*  
717 .03  
718 +  
719 RCL 00  
720 30  
721 -  
722 \*  
723 CHS  
724 RCL 10  
725 .715  
726 Y↑X  
727 .723  
728 \*  
729 +

730 RCL 04  
731 -1.63 E-  
3  
732 \*  
733 E↑X  
734 \*  
735 .049  
736 \*  
737 ST- 00  
738 ST- 02  
739 STO 03  
740 END

## DRAG - DRAG COUNT AND EXTERNAL STORES WEIGHT

### 1. EQUATIONS

No equations are used in this program. The user indicates the type of store to be loaded. The program then selects an appropriate store subroutine which calculates the drag count and stores weight for the station(s). Stations one and five and stations two and four are grouped together. In order for the store subroutine to correctly calculate drag count and weight, it must know the rack type and which rack positions are loaded. The subroutine "MTA" determines the type of rack loaded on each station and sets appropriate flags to indicate rack type to the store subroutine. If a MER or TER is loaded, the program prompts for the rack configuration, receiving inputs from the user defined keys. A rack configuration code is assigned based on these inputs and is used by the store subroutine to assign a station drag count. Table DRAG-1 summarizes the possible station configuration codes which will be stored in R05 by the routine.

### 2. PROGRAMS AND SUBROUTINES USED

"MTA" - Computes rack type and rack configuration code.

"ST" - Utility.

"SP" - Utility.

"S2" - Utility.

"S3" - Utility.

Code:	Configuration:		
0	AERO-7A/AERO-7B		
	(fwd)	(aft)	
1		▽	Empty TER
2	▽	▽	Empty MER
3		▽	TER
4	▽	▽	MER
4		▽	TER
5		▽	TER
5	▽	▽	MER
5	▽	▽	MER
6	▽	▽	MER
8	▽	▽	MER
9	▽	▽	MER
10	▽	▽	MER

Table DRAG - 1

### 3. FLAGS, DATA STORAGE REGISTERS AND PROGRAM STORAGE REQUIREMENTS.

#### a. Flags used:

Flag:	Meaning When Set:
01	Current stations are 1 and 5.
02	Current stations are 2 and 4.
03	Current station is 3.
04	Conical tail bomb

Flag:	Meaning When Set:
05	MER
06	TER
07	AERO-7
08	Empty TER
09	Empty MER
10	Training store

b. Data storage registers.

Register:	Contents:
R00	Total drag count
R01	Stations 1 and 5 drag count
R02	Stations 2 and 4 drag count
R03	Station 3 drag count
R04	Station type 1=1/5; 2=2/4; 3=3
R05	Rack configuration code
R06	Empty inboard (0.7) or empty outboard (1.1) stations drag factor.
R07	Temporary storage - numeric store type
R08	Stores weight
R09	Return loop indirect address register
R10	Stations 1 and 5 drag factor (1 or 0.7)
R11	Stations 2 and 4 drag factor (1 or 1.1)
R12	Temporary stores weight register
R13	Temproary storage
R14	Alternate weight storage register (used by training store routines)

c. Program storage requirement is 249 registers, 1737 bytes.

4. FLOWCHART

See following page.

AD-A138 897


DEVELOPMENT OF THE A-6E/A-6E TRAM/KA-6D NATOPS (NAVAL  
AIR TRAINING AND OP. (U) NAVAL POSTGRADUATE SCHOOL  
MONTEREY CA D F HARGRAVE DEC 83


2/2

UNCLASSIFIED

F/G 1/3


NL

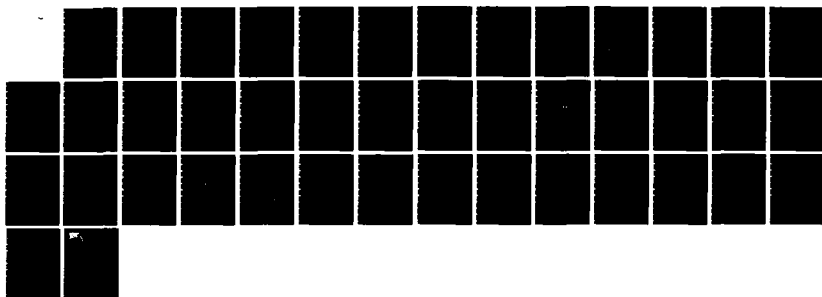


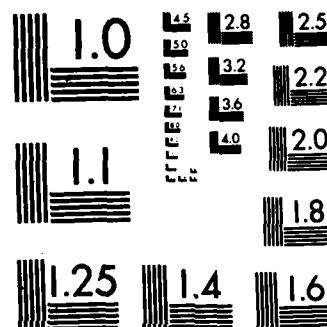



MICROCOPY RESOLUTION TEST CHART  
NATIONAL BUREAU OF STANDARDS-1963-A


# DRAG

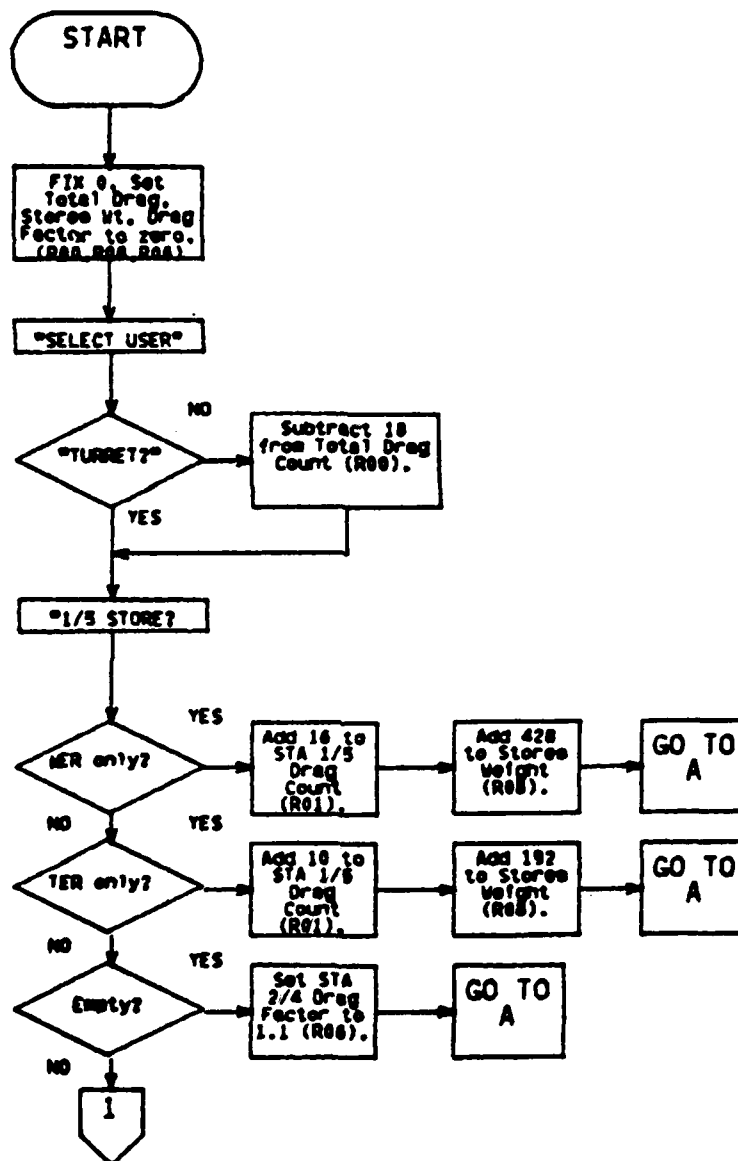


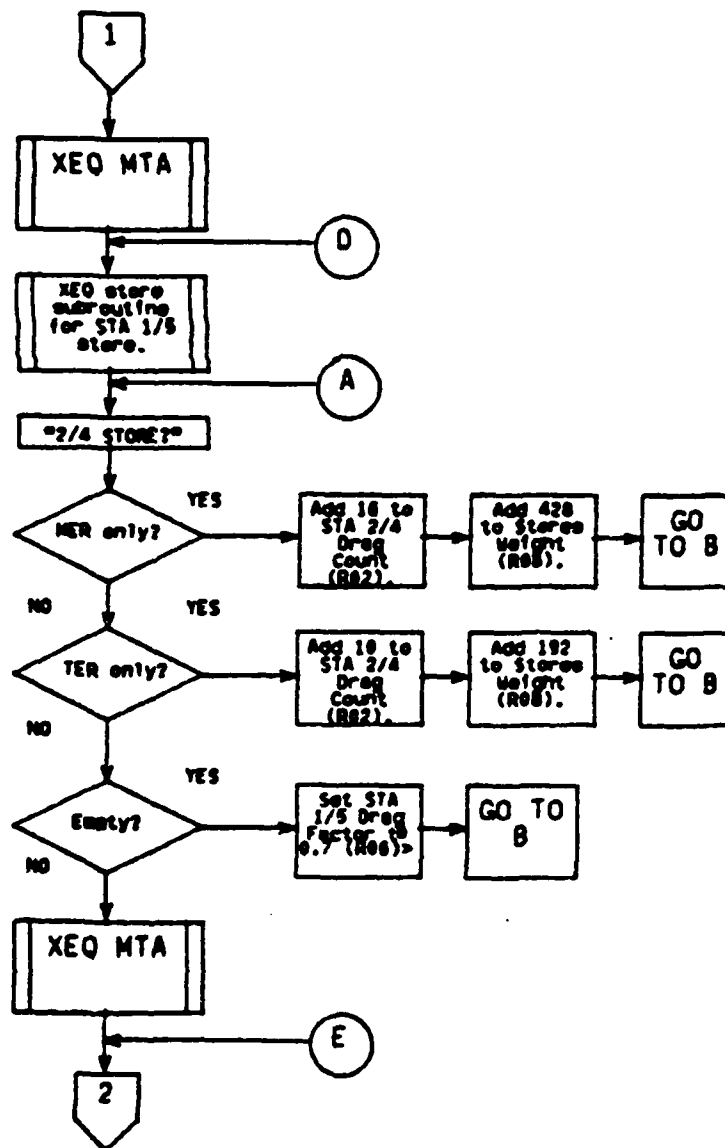


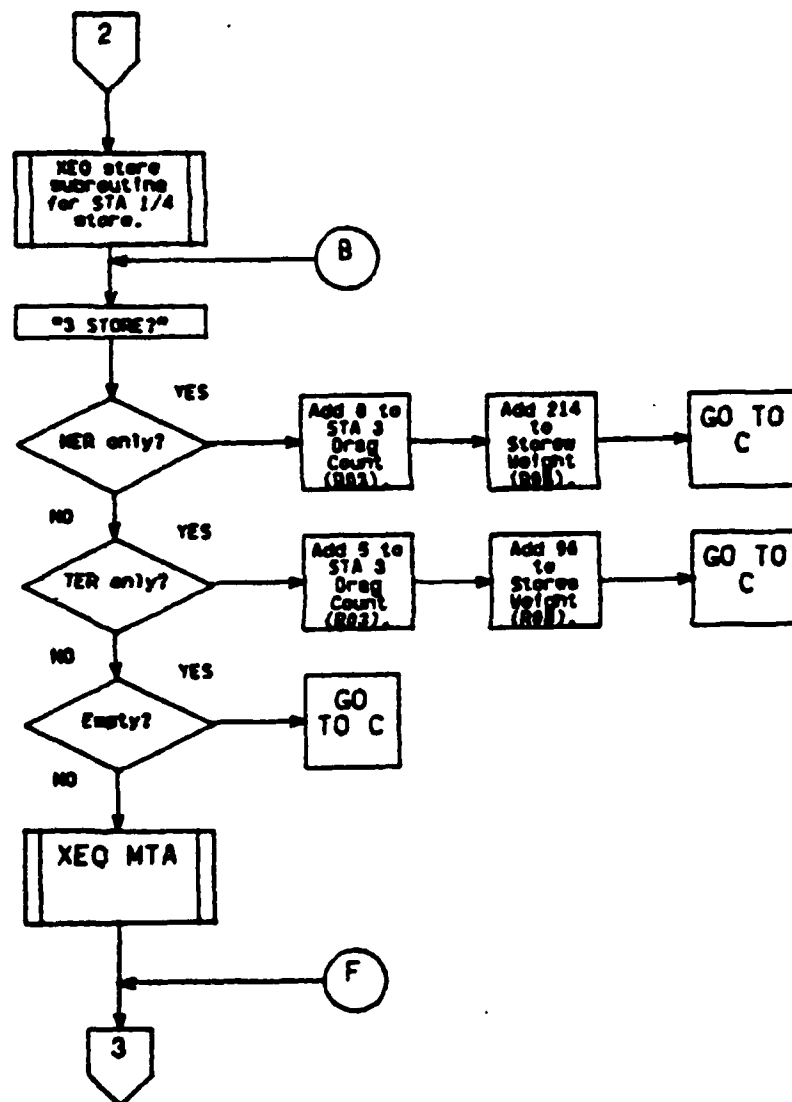

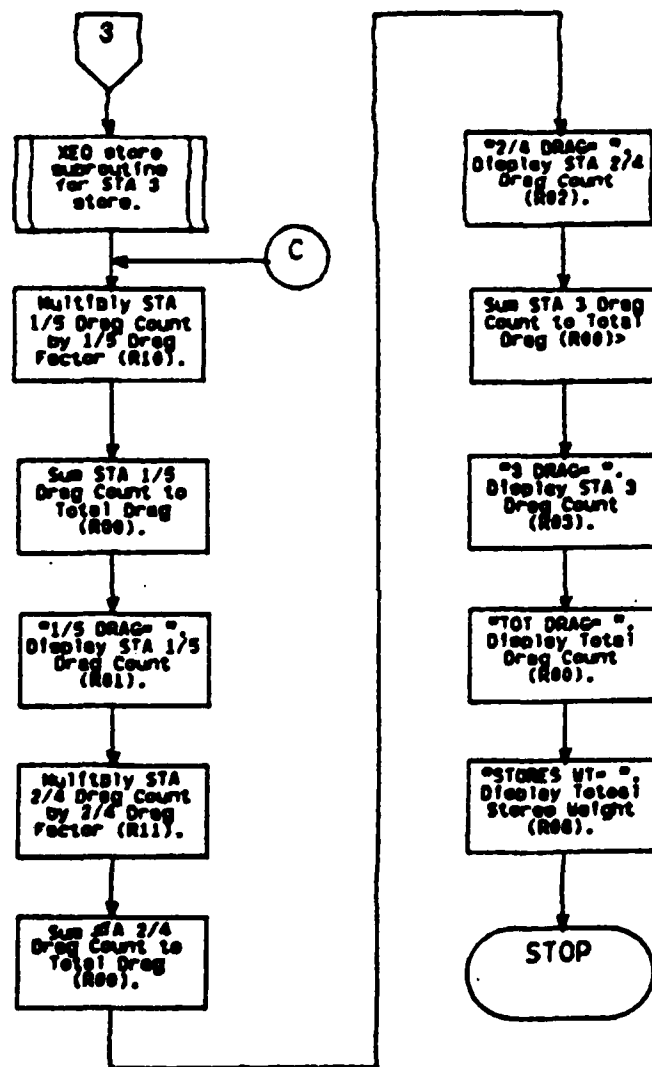


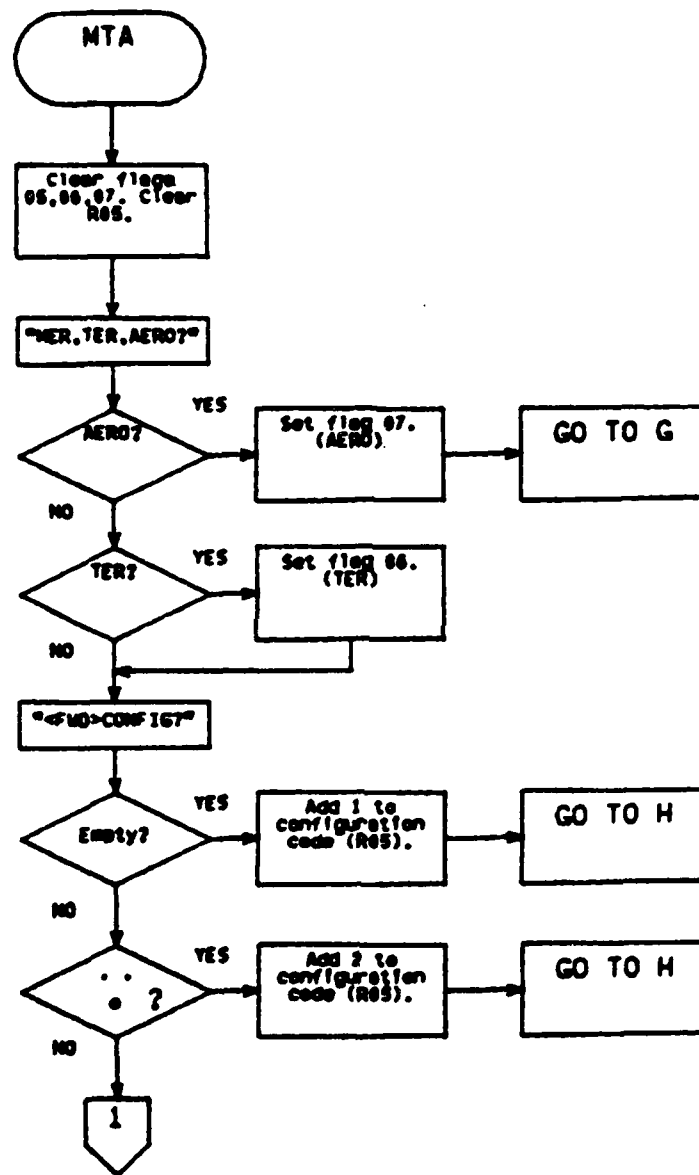


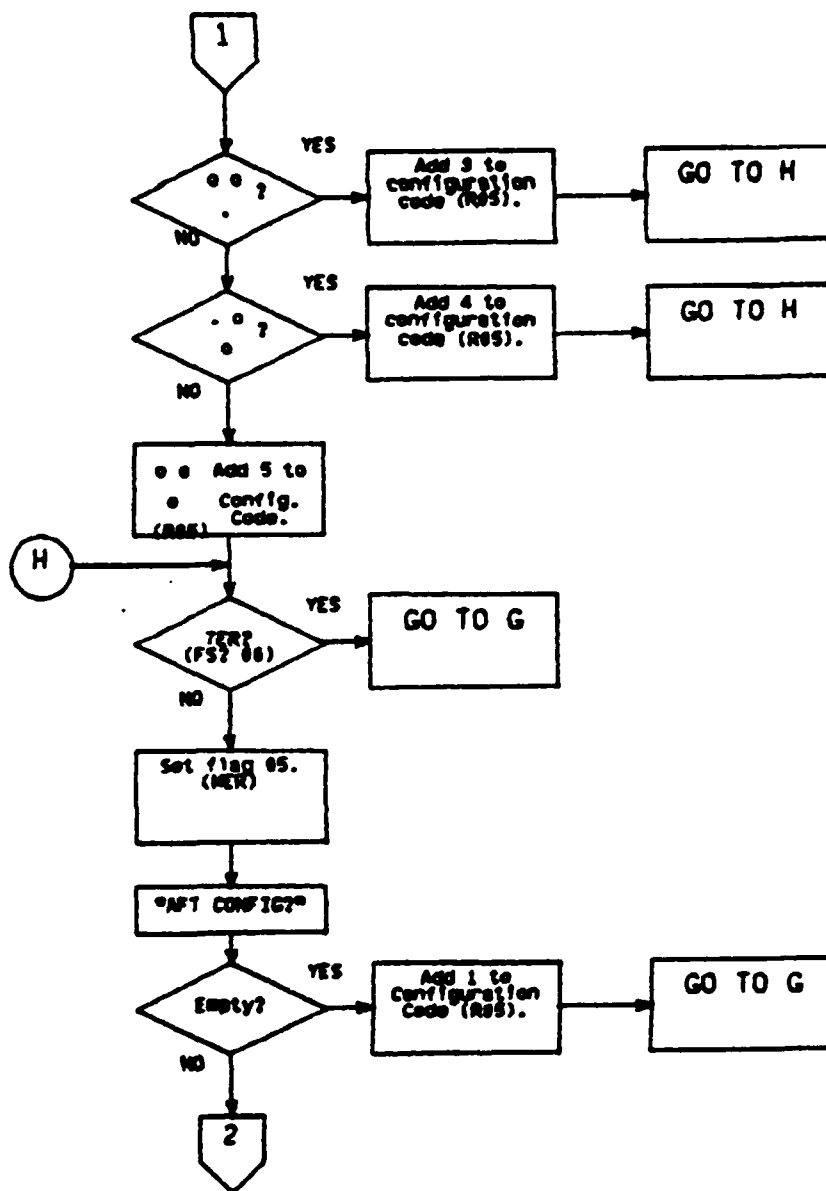

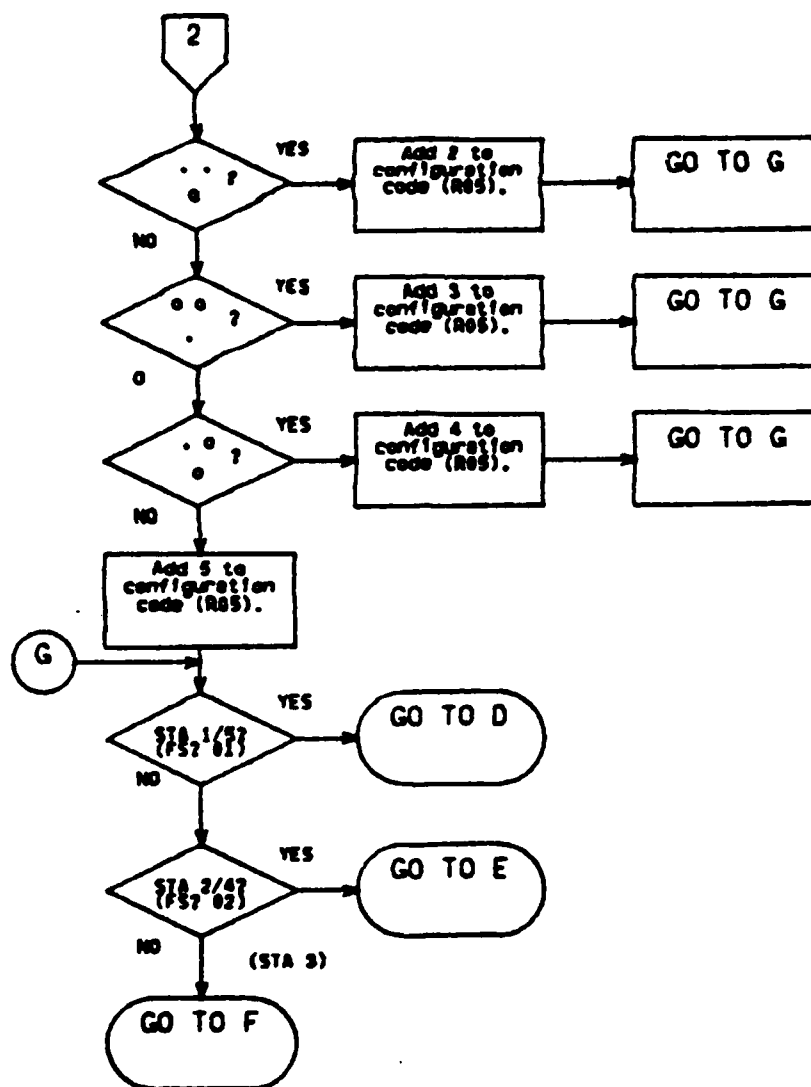

# TYPICAL STORE SUBROUTINE (MK 82)

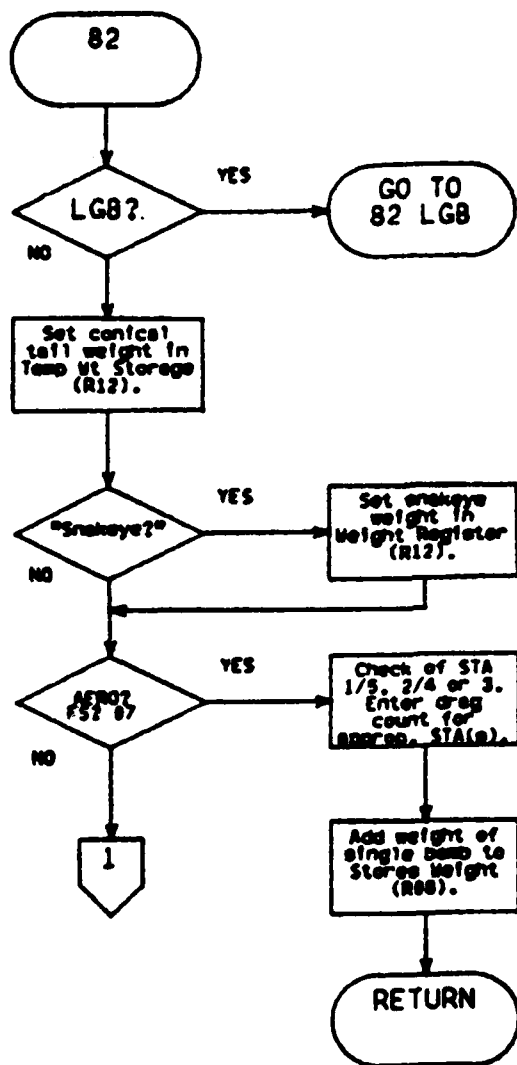

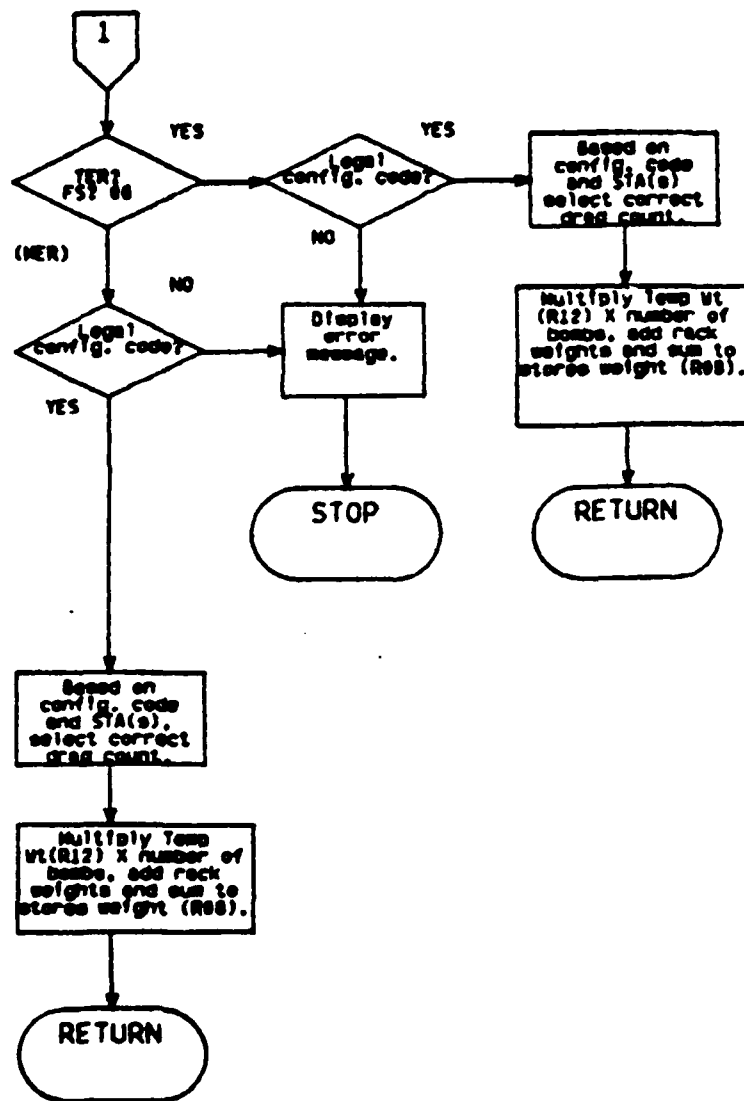

# 5. PROGRAM LISTING

01♦LBL "DRA	44 192
G"	45 ST+ 08
02 FIX 0	46 GT0 99
03 0	47♦LBL 96
04 STO 00	48 GT0 "MTA
05 STO 08	"
06 1	49♦LBL 93
07 STO 10	50 GT0 IND
08 STO 11	07
09 CF 10	51♦LBL 99
10 "SELECT	52 CF 01
USER"	53 SF 02
11 AON	54 98
12 PSE	55 STO 09
13 AOFF	56 "2/4 STO
14 "TURRET?"	RE?"
"	57 PROMPT
15 PROMPT	58 STO 07
16♦LBL A	59 GT0 95
17 18	60♦LBL F
18 STO 00	61 .7
19♦LBL B	62 STO 10
20 CF 02	63 0
21 CF 03	64 STO 02
22 SF 01	65 GT0 98
23 99	66♦LBL C
24 STO 09	67 16
25 "1/5 STO	68 STO 02
RE?"	69 428
26 PROMPT	70 ST+ 08
27 STO 07	71 GT0 98
28 GT0 96	72♦LBL D
29♦LBL F	73 10
30 1.1	74 STO 02
31 STO 11	75 192
32 0	76 ST+ 08
33 STO 01	77 GT0 98
34 GT0 99	78♦LBL 95
35♦LBL C	79 XEQ "MTA
36 16	"
37 STO 01	80♦LBL 92
38 428	81 GT0 IND
39 ST+ 08	07
40 GT0 99	82♦LBL 98
41♦LBL D	83 CF 02
42 10	84 SF 03
43 STO 01	85 97

```

86 STO 09
87 -3 STORE
?"
88 PROMPT
89 STO 07
90 GTO 94
91♦LBL F
92 0
93 STO 03
94 GTO 97
95♦LBL C
96 8
97 STO 03
98 214
99 ST+ 08
100 GTO 97
101♦LBL D
102 5
103 STO 03
104 96
105 ST+ 08
106 GTO 97
107♦LBL 94
108 XEQ -MTA
"
109♦LBL 91
110 GTO IND
07
111♦LBL 97
112 RCL 01
113 RCL 10
114 *
115 ST+ 00
116 -1/5 DRA
G="
117 ARCL X
118 AVIEW
119 STOP
120 RCL 02
121 RCL 11
122 *
123 ST+ 00
124 -2/4 DRA
G="
125 ARCL X
126 AVIEW
127 STOP
128 RCL 03
129 ST+ 00
130 -3 DRAG=
"

```

```

131 ARCL X
132 AVIEW
133 STOP
134 RCL 00
135 -TOT DRA
G="
136 ARCL X
137 AVIEW
138 STOP
139 RCL 08
140 -STORES
="
141 ARCL X
142 AVIEW
143 STOP
144 GTO -DRA
G="
145♦LBL -MTA
"
146 0
147 STO 05
148 CF 05
149 CF 06
150 CF 07
151 -MER/TER
/AERO?"
152 PROMPT
153♦LBL E
154 SF 07
155 GTO 02
156♦LBL D
157 SF 06
158♦LBL C
159 -<FWD> C
ONFIG?"
160 PROMPT
161♦LBL F
162 1
163 STO 05
164 GTO 01
165♦LBL G
166 2
167 STO 05
168 GTO 01
169♦LBL H
170 3
171 STO 05
172 GTO 01
173♦LBL I
174 4
175 STO 05

```

```

176 GTO 01
177♦LBL J
178 5
179 STO 05
180♦LBL 01
181 FS? 06
182 GTO 02
183 SF 05
184 "AFT CON
FIG"
185 PROMPT
186♦LBL F
187 1
188 ST+ 05
189 GTO 02
190♦LBL G
191 2
192 ST+ 05
193 GTO 02
194♦LBL H
195 3
196 ST+ 05
197 GTO 02
198♦LBL I
199 4
200 ST+ 05
201 GTO 02
202♦LBL J
203 5
204 ST+ 05
205♦LBL 02
206 FS? 01
207 GTO 93
208 FS? 02
209 GTO 92
210 GTO 91
211 GTO 87
212♦LBL 81
213 SF 04
214 260
215 STO 12
216 "SNAKEYE
?"
217 PROMPT
218♦LBL A
219 301
220 STO 12
221 CF 04
222♦LBL B
223 GTO IND
05

```

```

224♦LBL 00
225 10
226 ENTER↑
227 FS? 04
228 6
229 ENTER↑
230 XEQ "ST"
231 XEQ "S2"
232 2
233 *
234 XEQ "S3"
235 STO 14
236 ST+ 08
237 GTO 21
238♦LBL 04
239 FS? 03
240 GTO 89
241 36
242 ENTER↑
243 FS? 04
244 28
245 ENTER↑
246 XEQ "ST"
247 RCL 12
248 4
249 *
250 STO 14
251 192
252 +
253 ST+ 08
254 GTO 21
255♦LBL 05
256 46
257 ENTER↑
258 FS? 04
259 36
260 ENTER↑
261 XEQ "ST"
262 XEQ "S2"
263 6
264 *
265 STO 14
266 192
267 +
268 XEQ "S3"
269 ST+ 08
270 GTO 21
271♦LBL 08
272 56
273 ENTER↑
274 FS? 04

```

```

275 44
276 ENTER↑
277 FS? 03
278 GTO 89
279 XEQ "S3"
280 RCL 12
281 8
282 *
283 STO 14
284 428
285 +
286 ST+ 08
287 GTO 21
288♦LBL 09
289 FS? 01
290 GTO 89
291 FS? 03
292 GTO 89
293 66
294 ENTER↑
295 FS? 04
296 50
297 ENTER↑
298 STO 02
299 RCL 12
300 10
301 *
302 STO 14
303 428
304 +
305 ST+ 08
306 GTO 21
307♦LBL 10
308 FS? 02
309 GTO 89
310 72
311 ENTER↑
312 FS? 04
313 54
314 ENTER↑
315 FS? 01
316 STO 01
317 XEQ "S3"
318 12
319 *
320 STO 14
321 428
322 +
323 XEQ "S3"
324 ST+ 08
325 GTO 21

```

```

326♦LBL 21
327 FS? 10
328 GTO IND
13
329 GTO IND
09
330♦LBL 89
331 BEEP
332 "NON-STD
LOAD"
333 PROMPT
334 GTO "DRA
G"
335♦LBL 76
336 740
337 STO 12
338 52
339 ENTER↑
340 XEQ "ST"
341 XEQ "S2"
342 XEQ "S3"
343 ST+ 08
344 GTO 21
345♦LBL 82
346 "LGB?"
347 PROMPT
348♦LBL A
349 GTO 22
350♦LBL B
351 SF 04
352 531
353 STO 12
354 "SNAKEYE
?"
355 PROMPT
356♦LBL A
357 572
358 STO 12
359 CF 04
360♦LBL B
361 GTO IND
05
362♦LBL 00
363 11
364 ENTER↑
365 FS? 04
366 7
367 ENTER↑
368 XEQ "ST"
369 6
370 ENTER↑

```

```

371 FS? 04
372 3
373 ENTER↑
374 FS? 03
375 STO 03
376 RCL 12
377 2
378 *
379 XEQ "-S3-"
380 ST+ 08
381 STO 14
382 GTO 21
383♦LBL 04
384 FS? 03
385 GTO 89
386 41
387 ENTER↑
388 FS? 04
389 31
390 ENTER↑
391 XEQ "-ST-"
392 RCL 12
393 4
394 *
395 STO 14
396 192
397 +
398 ST+ 08
399 GTO 21
400♦LBL 05
401 60
402 ENTER↑
403 FS? 06
404 54
405 ENTER↑
406 FS? 04
407 38
408 ENTER↑
409 XEQ "-ST-"
410 XEQ "-S2-"
411 6
412 *
413 STO 14
414 192
415 +
416 FS? 06
417 136
418 FS? 06
419 +
420 XEQ "-S3-"
421 ST+ 08

```

```

422 GTO 21
423♦LBL 08
424 60
425 ENTER↑
426 FS? 04
427 46
428 ENTER↑
429 FS? 03
430 GTO 89
431 XEQ "-ST-"
432 RCL 12
433 8
434 *
435 STO 14
436 428
437 +
438 ST+ 08
439 GTO 21
440♦LBL 09
441 FS? 01
442 GTO 89
443 FS? 03
444 GTO 89
445 74
446 ENTER↑
447 FS? 04
448 54
449 ENTER↑
450 STO 02
451 RCL 12
452 10
453 *
454 STO 14
455 428
456 +
457 ST+ 08
458 GTO 21
459♦LBL 10
460 FS? 02
461 GTO 89
462 80
463 ENTER↑
464 FS? 04
465 58
466 ENTER↑
467 FS? 01
468 STO 01
469 XEQ "-S2-"
470 12
471 *
472 STO 14

```

```

473 428
474 +
475 XEQ "S3"
476 ST+ 08
477 GT0 21
478♦LBL A
479 RCL 05
480 2
481 -
482 X>0?
483 GT0 89
484 34
485 ENTER↑
486 FS? 07
487 18
488 ENTER↑
489 FS? 05
490 GT0 89
491 XEQ "ST"
492 17
493 ENTER↑
494 FS? 03
495 STO 03
496 1202
497 ENTER↑
498 FS? 06
499 1394
500 ENTER↑
501 FS? 03
502 XEQ "S3"
503 ST+ 08
504 GT0 21
505♦LBL 83
506 "LGB?"
507 PROMPT
508♦LBL B
509 FS? 05
510 11
511 STO 05
512 GT0 IND
05
513♦LBL 00
514 8
515 ENTER↑
516 XEQ "ST"
517 XEQ "S2"
518 1970
519 ENTER↑
520 XEQ "S3"
521 ST+ 08
522 STO 14

```

```

523 GT0 21
524♦LBL 04
525 FS? 03
526 GT0 89
527 16
528 ENTER↑
529 XEQ "ST"
530 3940
531 STO 14
532 192
533 +
534 ST+ 08
535 GT0 21
536♦LBL 05
537 FS? 02
538 GT0 89
539 44
540 ENTER↑
541 FS? 01
542 STO 01
543 XEQ "S2"
544 5910
545 ENTER↑
546 XEQ "S3"
547 STO 14
548 192
549 +
550 ST+ 08
551 GT0 21
552♦LBL 11
553 52
554 ENTER↑
555 XEQ "ST"
556 XEQ "S2"
557 5910
558 ENTER↑
559 XEQ "S3"
560 STO 14
561 428
562 +
563 ST+ 08
564 GT0 21
565♦LBL A
566 RCL 05
567 2
568 -
569 X>0?
570 GT0 89
571 46
572 ENTER↑
573 FS? 07

```

574 28  
 575 ENTER↑  
 576 FS? 05  
 577 GT0 89  
 578 XEQ "ST"  
 579 23  
 580 ENTER↑  
 581 FS? 03  
 582 ST0 03  
 583 2200  
 584 ENTER↑  
 585 FS? 06  
 586 2392  
 587 ENTER↑  
 588 XEQ "S3"  
 589 ST+ 08  
 590 GT0 21  
 591♦LBL 86  
 592 SF 10  
 593 68  
 594 ST0 13  
 595 GT0 81  
 596♦LBL 68  
 597 RCL 14  
 598 .1654  
 599 GT0 "SP"  
 600♦LBL 87  
 601 SF 10  
 602 78  
 603 ST0 13  
 604 GT0 82  
 605♦LBL 78  
 606 RCL 14  
 607 .3729  
 608 GT0 "SP"  
 609♦LBL 88  
 610 SF 10  
 611 28  
 612 ST0 13  
 613 GT0 83  
 614♦LBL 28  
 615 RCL 14  
 616 .2051  
 617 GT0 "SP"  
 618♦LBL 84  
 619 "LGB?"  
 620 PROMPT  
 621♦LBL B  
 622 FS? 05  
 623 GT0 89  
 624 FS? 06

625 GT0 89  
 626 11  
 627 ENTER↑  
 628 XEQ "ST"  
 629 2  
 630 /  
 631 FS? 03  
 632 ST0 03  
 633 2005  
 634 ST+ 08  
 635 GT0 21  
 636♦LBL A  
 637 FS? 03  
 638 GT0 89  
 639 44  
 640 ENTER↑  
 641 XEQ "ST"  
 642 4260  
 643 ST+ 08  
 644 GT0 21  
 645♦LBL 01  
 646 20  
 647 ENTER↑  
 648 XEQ "ST"  
 649 XEQ "S2"  
 650 4476  
 651 ENTER↑  
 652 XEQ "S3"  
 653 ST+ 08  
 654 GT0 21  
 655♦LBL 58  
 656 FS? 06  
 657 GT0 89  
 658 FS? 07  
 659 GT0 89  
 660 67  
 661 ENTER↑  
 662 XEQ "ST"  
 663 XEQ "S2"  
 664 584  
 665 ENTER↑  
 666 XEQ "S3"  
 667 ST+ 08  
 668 GT0 21  
 669♦LBL 41  
 670 GT0 84  
 671♦LBL 45  
 672 28  
 673 ST0 12  
 674 GT0 IND  
 05

675♦LBL 05  
 676 45  
 677 ENTER↑  
 678 XEQ "ST"  
 679 XEQ "S2"  
 680 6  
 681 \*  
 682 192  
 683 +  
 684 XEQ "S3"  
 685 ST+ 08  
 686 GTO 21  
 687♦LBL 10  
 688 68  
 689 ENTER↑  
 690 XEQ "ST"  
 691 XEQ "S2"  
 692 12  
 693 \*  
 694 48  
 695 +  
 696 XEQ "S3"  
 697 ST+ 08  
 698 GTO 21  
 699♦LBL 56  
 700 136  
 701 ENTER↑  
 702 XEQ "ST"  
 703 XEQ "S2"  
 704 4430  
 705 ENTER↑  
 706 XEQ "S3"  
 707 ST+ 08  
 708 GTO 21  
 709♦LBL 52  
 710 90  
 711 ENTER↑  
 712 XEQ "ST"  
 713 XEQ "S2"  
 714 2486  
 715 ENTER↑  
 716 XEQ "S3"  
 717 ST+ 08  
 718 GTO 21  
 719♦LBL 55  
 720 126  
 721 ENTER↑  
 722 XEQ "ST"  
 723 XEQ "S2"  
 724 4388  
 725 ENTER↑

726 XEQ "S3"  
 727 ST+ 08  
 728 GTO 21  
 729♦LBL 25  
 730 116  
 731 ENTER↑  
 732 XEQ "ST"  
 733 XEQ "S2"  
 734 4264  
 735 ENTER↑  
 736 XEQ "S3"  
 737 ST+ 08  
 738 GTO 21  
 739♦LBL 36  
 740 88  
 741 ENTER↑  
 742 XEQ "ST"  
 743 XEQ "S2"  
 744 2516  
 745 ENTER↑  
 746 XEQ "S3"  
 747 ST+ 08  
 748 GTO 21  
 749 ENTER↑  
 750♦LBL "ST"  
 751 FS? 01  
 752 STO 01  
 753 FS? 02  
 754 STO 02  
 755 RTN  
 756♦LBL "S3"  
 757 FS? 03  
 758 2  
 759 FS? 03  
 760 /  
 761 RTN  
 762♦LBL "SP"  
 763 \*  
 764 ST- 08  
 765 CF 10  
 766 GTO 21  
 767♦LBL "S2"  
 768 2  
 769 /  
 770 FS? 03  
 771 STO 03  
 772 RCL 12  
 773 .END.

## LAA - LANDING AND APPROACH SPEEDS

### 1. EQUATIONS

$$V_s = 48.25 + 1.375W$$

$$V_{sw} = 1.09V_s$$

$$V_{mld} = 1.18V_s$$

$$V_{app} = 1.28V_s$$

$V_s$  = power approach stall speed [KCAS]

$W$  = gross weight [pounds/1000]

$V_{sw}$  = stall warning speed [KCAS]

$V_{mld}$  = minimum landing distance approach speed [KCAS]

$V_{app}$  = optimum approach speed [KCAS]

### 2. FLOWCHART

See following page.

### 3. PROGRAMS AND SUBROUTINES USED

None.

### 4. FLAGS, DATA STORAGE REGISTERS AND PROGRAM STORAGE REQUIREMENTS

a. Flags used: none


b. Data storage registers.

Register:	Contents:
-----------	-----------

R00	Power approach stall speed ( $V_s$ )
-----	--------------------------------------

c. Program storage requirement is 18 registers, 124 bytes.

LAA

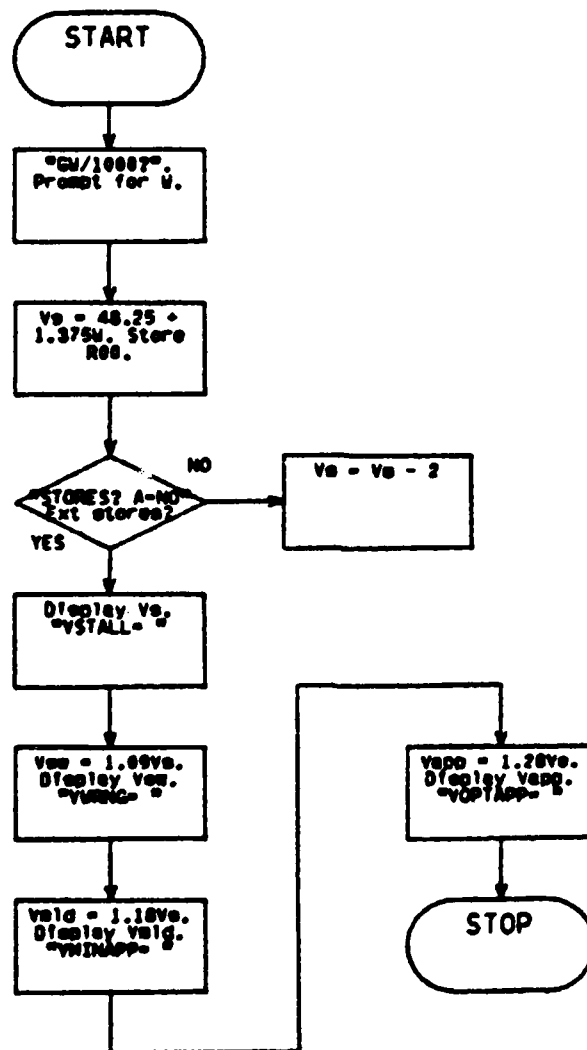

# 5. PROGRAM LISTING

```

01♦LBL "LAA
-
02 FIX 0
03 "GW/1000
?"
04 PROMPT
05 1.375
06 *
07 48.25
08 +
09 STO 00
10 "STORES?
A=NO"
11 PROMPT
12 GTO 10
13♦LBL A
14 2
15 ST- 00
16♦LBL 10
17 "YSTALL=
-
18 ARCL 00
19 PROMPT
20 RCL 00
21 1.09
22 *
23 "VWRNG="
24 ARCL X
25 PROMPT
26 RCL 00
27 1.18
28 *
29 "VMINAPP
="
30 ARCL X
31 PROMPT
32 RCL 00
33 1.28
34 *
35 "VOPTAPP
="
36 ARCL X
37 PROMPT
38 GTO "LAA
-
39 END

```

# RS - MAXIMUM REFUSAL SPEED

## 1. EQUATIONS

$$V_r = q - G(0.2222 + 0.0028q)$$

$$q = s + V_w(0.815 + 0.0015s)$$

$$s = 20.2262 + 0.998657a + 0.012087 + 0.0012332aL \\ + 0.21508a^2 - 5.8018 \times 10^{-6} L^2$$

$$a = 10.396 - 0.059933W - 0.345833H - 0.020611T$$

$$V_r = \text{refusal speed [KCAS]}$$

$$G = \text{runway slope gradient (+uphill/-downhill) [percent]}$$

$$V_w = \text{wind component (+headwind/-tailwind) [knots]}$$

$$W = \text{aircraft gross weight [pounds/1000]}$$

$$h = \text{runway pressure altitude [pounds/1000]}$$

$$T = \text{runway temperature [degrees Fahrenheit]}$$

## 2. FLOWCHART

See following page.

## 4. FLAGS, DATA STORAGE REGISTERS AND PROGRAM STORAGE REQUIREMENTS


a. Flags used: none.

b. Data storage registers.

Register:	Contents:
R00	Intermediate variable (a)
R01	Runway length (L)
R02	Intermediate variable (s)

c. Program storage requirement is 33 registers, 230 bytes.

RS

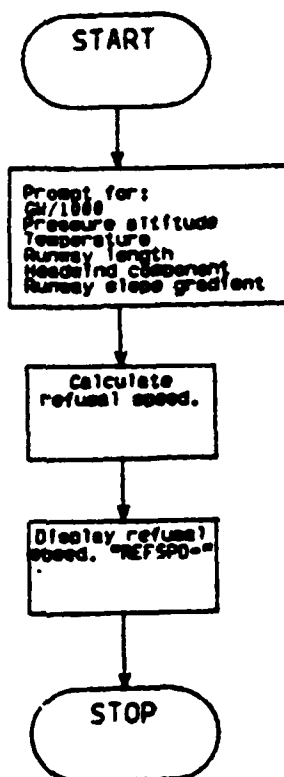

# 5. PROGRAM LISTING

```

01 LBL "RS"
02 FIX 0
03 10.3955
04 ENTER↑
05 "GW*1000
?"
06 PROMPT
07 .0599333
08 *
09 -
10 "P.ALT:
FT?"
11 PROMPT
12 .345833
E-3
13 *
14 -
15 "TEMP: F
?"
16 PROMPT
17 .0206108
18 *
19 -
20 STO 00
21 X↑2
22 .215078
23 *
24 20.2262
25 +
26 "RWY LT:
FT?"
27 PROMPT
28 STO 01
29 .0120871
30 *
31 +
32 RCL 00
33 RCL 01
34 *
35 .0012332
2
36 *
37 +
38 RCL 01
39 X↑2
40 .580182
E-6

```

```

41 *
42 -
43 RCL 00
44 .998257
45 *
46 +
47 STO 02
48 .0015
49 *
50 .815
51 +
52 "+HW/-TW
: KTS?"
53 PROMPT
54 *
55 ST+ 02
56 RCL 02
57 .0028
58 *
59 .2222
60 +
61 CHS
62 "RWY GRA
D?"
63 PROMPT
64 *
65 RCL 02
66 +
67 "REFSPD:
"
68 ARCL X
69 AVIEW
70 .END.

```

TANK - TANKER MISSION PROFILE - KA-6D

1. EQUATIONS

a. Low holding.

$$G_L = 0.98755Q - 4.9875t + 0.92422t^2 - 0.034546t^2 Q \\ - 4.7595$$

b. High holding.

$$G_H = 0.97560Q - 4.0873t + 0.60452t^2 - 0.025812t^2 Q \\ - 4.6476$$

G = give away fuel [pounds/1000]

Q = fuel onboard [pounds/1000]

t = time until recovery [hours]

2. FLOWCHART

See following page.

3. PROGRAMS AND SUBROUTINES USED

None.

4. FLAGS, DATA STORAGE REGISTERS AND PROGRAM STORAGE  
REQUIREMENTS


a. Flags used: none.

b. Data storage registers.

Register:	Contents:
R00	Fuel onboard (Q)
R01	Hours until recovery (t)

c. Program storage requirement is 25 registers, 174 bytes.

# TANK

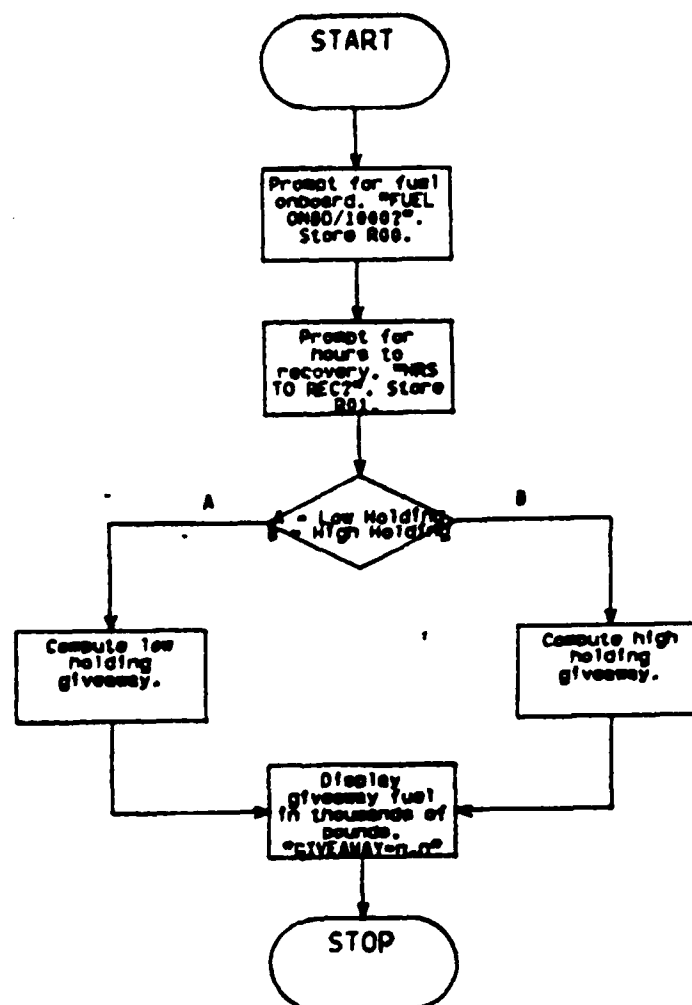

# 5. PROGRAM LISTING

```

01♦LBL "TAN
K"
02 FIX 1
03 "FUEL ON
BD=?"
04 PROMPT
05 STO 00
06 "HRS TO
REC?"
07 PROMPT
08 STO 01
09 "A=LOW,
B=HIGH"
10 PROMPT
11♦LBL A
12 X↑2
13 .924222
14 *
15 RCL 01
16 X↑2
17 RCL 00
18 *
19 .0345456
20 *
21 -
22 RCL 01
23 4.98754
24 *
25 -
26 RCL 00
27 .987547

```

```

28 *
29 +
30 4.75948
31 -
32 GT0 00
33♦LBL B
34 X↑2
35 .604523
36 *
37 RCL 01
38 X↑2
39 RCL 00
40 *
41 .0258123
42 *
43 -
44 RCL 01
45 4.08726
46 *
47 -
48 RCL 00
49 .975598
50 *
51 +
52 4.64756
53 -
54♦LBL 00
55 "GIVEAWA
Y: "
56 ARCL X
57 RVIEW
58 .END.

```

TO - NORMAL TAKE-OFF DISTANCE AND LINE SPEED CHECK

1. EQUATIONS

a. Take-off distance and speed.

$$V_L = 21.41W^{0.4854}$$

$$K_t = 3.72 \times 10^4 W^{2.45}$$

$$\begin{aligned} K_a = & 0.52399K_t + 5.2425 \times 10^{-3}T + 3.0246 \times 10^{-5}T K_t^2 \\ & + 9.5067 \times 10^{-5}TK_t^2 - 3.8133 \times 10^{-5}T^2 - 8.1735 \times 10^{-4}K_t^3 \\ & - 0.067364 \end{aligned}$$

$$\begin{aligned} K_W = & 0.035628 + 1.0106 \times 10^{-4}A + 0.98964K_a - 8.8825 \times 10^{-7}A^2 \\ & + 1.1121 \times 10^{-6}A^2 K_a + 1.1797 \times 10^{-5}AK_a^2 \end{aligned}$$

$$K_g = K_W - (0.005 + 0.01K_W)W$$

$$D = K_g(1 + 0.03333G), \quad (0 < K_g < 4.5)$$

$$D = K_g + G(0.06667K_g - 0.1333), \quad (K_g \geq 4.5)$$

where

$V_L$  = lift-off speed (KCAS)

$W$  = take-off gross weight [pounds/1000]

$K_t$  = Temperature curve baseline

$K_a$  = Pressure altitude curve baseline

$T$  = runway temperature [degrees Fahrenheit]

$K_W$  = wind curve baseline

$A$  = runway pressure altitude [ft]

$K_g$  = runway gradient curve baseline

$G$  = runway slope gradient (+uphill/-downhill) [percent]

$V$  = axial wind component (+headwind/-tailwind) [knots]

$D$  = take-off ground roll [ft/1000]

b. Line speed check.

$$K_g = D' / (1 + 0.03333G)$$

$$K_w = (K_g + 0.005V) / (1 - 0.01V)$$

$$K_a = 1.0613K_w - 7.48433 \times 10^{-4}A + 2.9436 \times 10^{-7}A^2 K_w \\ - 8.7916 \times 10^{-3}K_w^2 - 8.6058 \times 10^{-5}AK_w - 0.08128$$

$$K_t = 0.32038 + 1.8396K_a - 0.016751T - 1.7559 \times 10^{-3}TK_a^2 \\ + 6.3515 \times 10^{-5}T^2 + 0.014191K_a^3$$

$$L = 82.786 + 62.680K_t - 1.5818W - 6.4844K_t^2 \\ + 0.015037W^2 - 0.65919KW + 0.088812K_t^2W$$

D' = line speed distance [feet/1000]

L = line speed [KCAS]

c. Warnings.

If  $K_w > 7.5 + 6.25 \times 10^{-6}A$ , take-off is not recommended.

If  $K_w > 9.0 + 1.0 \times 10^{-5}A$ , take-off is unsafe.

2. PROGRAMS AND SUBROUTINES USED

None.

3. FLAGS, DATA STORAGE REGISTERS AND PROGRAM STORAGE REQUIREMENTS

a. Flags used: none.

b. Data storage registers.

Register:	Contents:
R00	Gross weight (W)
R01	$K_t$
R02	Runway temperature (T)


Register:	Contents:
R03	$K_a$
R04	Pressure altitude (A)
R05	$K_w$
R06	$K_g$
R07	Runway slope gradient (G)
R08	Headwind/tailwind (V)


c. Program storage requirement is 105 registers, 733 bytes.

#### 4. FLOWCHART

See following page.

TO

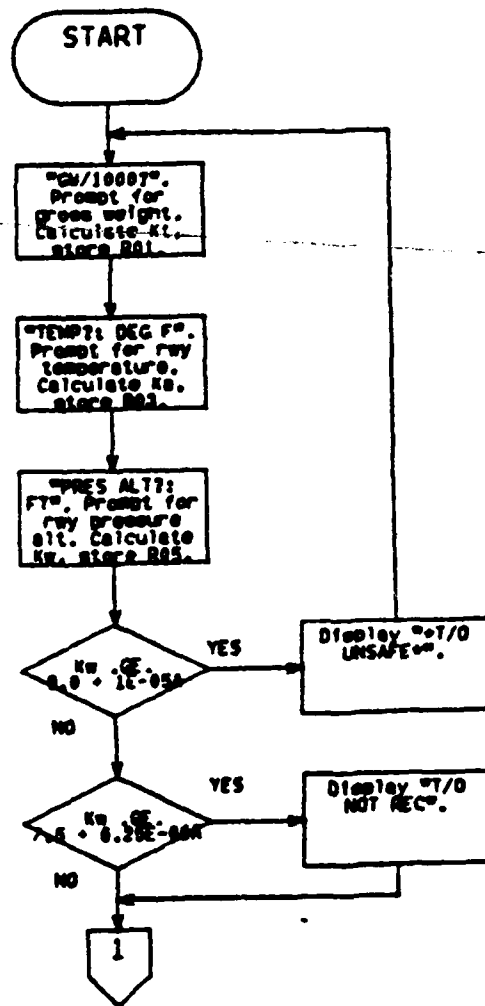

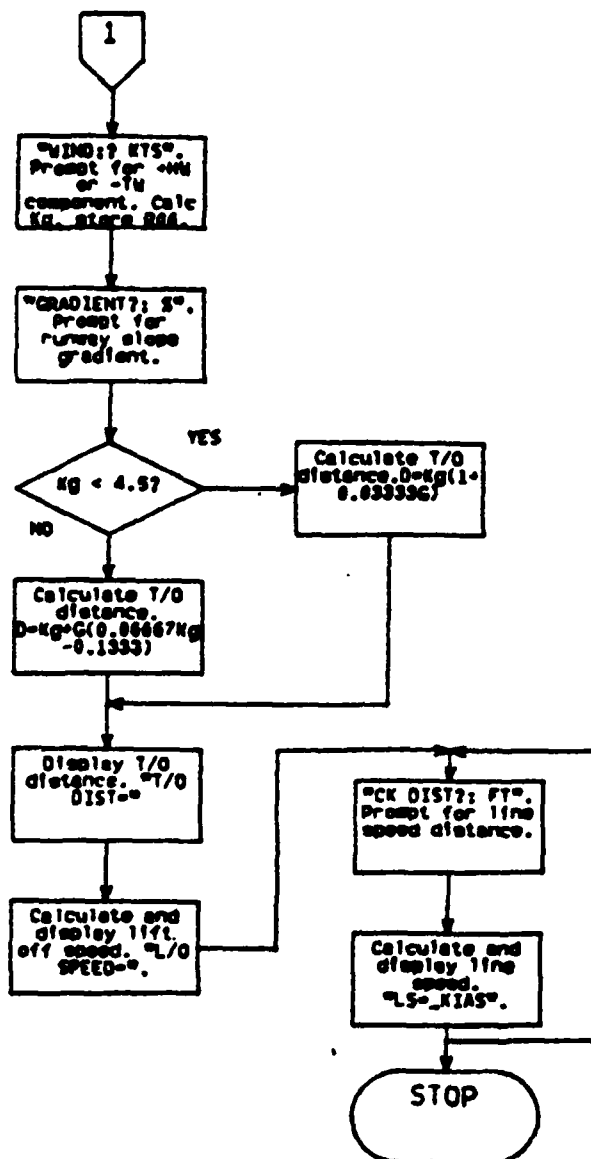

# 5. PROGRAM LISTING

01 LBL "TO"	42 8.1734 E
02 FIX 0	-4
03 "GW/1000	43 *
?"	44 -
04 PROMPT	45 .0673642
05 STO 00	46 -
06 2.45	47 STO 03
07 Y↑X	48 .989643
08 3.72 E-4	49 *
09 *	50 "PRES AL
10 STO 01	T?: FT"
11 "TEMP?:"	51 PROMPT
DEG F?"	52 STO 04
12 PROMPT	53 1.01058
13 STO 02	E-4
14 5.24248	54 *
E-3	55 +
15 *	56 RCL 04
16 RCL 01	57 RCL 03
17 .523991	58 X↑2
18 *	59 *
19 +	60 1.17971
20 RCL 01	E-5
21 RCL 02	61 *
22 X↑2	62 +
23 *	63 RCL 04
24 3.02457	64 X↑2
E-5	65 RCL 03
25 *	66 *
26 +	67 .111214
27 RCL 01	E-7
28 X↑2	68 *
29 RCL 02	69 +
30 *	70 RCL 04
31 9.50674	71 X↑2
E-5	72 .888251
32 *	E-8
33 +	73 *
34 RCL 02	74 -
35 X↑2	75 .0356282
36 3.81333	76 +
E-5	77 STO 05
37 *	78 9
38 -	79 -
39 RCL 01	80 RCL 04
40 3	81 1 E-5
41 Y↑X	82 *

```

83 -
84 X>0?
85 GTO 30
86 RCL 05
87 7.5
88 -
89 RCL 04
90 6.25 E-6
91 *
92 -
93 X>0?
94 GTO 40
95 GTO 50
96 LBL 30
97 *-T/O UN
SAFE*-
98 AVIEW
99 STOP
100 GTO -T0-
101 LBL 40
102 -T/O NOT
REC-
103 AVIEW
104 STOP
105 GTO 50
106 LBL 50
107 RCL 05
108 .01
109 *
110 .005
111 +
112 -WIND?:
KTS-
113 PROMPT
114 STO 08
115 *
116 CHS
117 RCL 05
118 +
119 STO 06
120 -GRADIEN
T?: %-
121 PROMPT
122 STO 07
123 RCL 06
124 4.5
125 -
126 X<0?
127 GTO 10
128 RCL 06
129 .06676

```

```

130 *
131 .13333
132 -
133 RCL 07
134 *
135 GTO 20
136 LBL 10
137 RCL 07
138 RCL 06
139 *
140 .03333
141 *
142 LBL 20
143 RCL 06
144 +
145 100
146 *
147 RND
148 10
149 *
150 -T/O DIS
T=-
151 ARCL X
152 AVIEW
153 STOP
154 RCL 00
155 .4854
156 Y↑X
157 21.41
158 *
159 -L/O SPD
=-
160 ARCL X
161 AVIEW
162 STOP
163 LBL 60
164 -CK DIST
?: FT-
165 PROMPT
166 1000
167 /
168 RCL 07
169 .033333
170 *
171 1
172 +
173 /
174 RCL 08
175 .005
176 *
177 +

```

```

178 1
179 ENTER↑
180 RCL 08
181 .01
182 *
183 -
184 /
185 STO 05
186 1.06129
187 *
188 RCL 04
189 .748427
E-5
190 *
191 -
192 RCL 04
193 X↑2
194 RCL 05
195 *
196 .294358
E-8
197 *
198 +
199 RCL 05
200 X↑2
201 8.79159
E-3
202 *
203 -
204 RCL 04
205 RCL 05
206 *
207 8.60575
E-5
208 *
209 -
210 .081277
211 -
212 STO 03
213 1.83958
214 *
215 .32038
216 +
217 RCL 02
218 .0167512
219 *
220 -
221 RCL 03
222 X↑2
223 RCL 02
224 *

```

```

225 1.75589
E-3
226 *
227 -
228 RCL 02
229 X↑2
230 6.35152
E-5
231 *
232 +
233 RCL 03
234 3
235 Y↑X
236 .0141913
237 *
238 +
239 STO 01
240 62.6795
241 *
242 82.7861
243 +
244 RCL 00
245 1.58175
246 *
247 -
248 RCL 01
249 X↑2
250 6.48441
251 *
252 -
253 RCL 00
254 X↑2
255 .0150366
256 *
257 +
258 RCL 00
259 RCL 01
260 *
261 .659185
262 *
263 -
264 RCL 01
265 X↑2
266 RCL 00
267 *
268 .0888122
269 *
270 +
271 "L/S="
272 ARCL X
273 "↑ KIAS"

```

-99-

274 RVIEW  
275 STOP  
276 GTO 60  
277 .END.

# XWL - CROSSWIND TAKE-OFF/LANDING

## 1. EQUATIONS

$$XWC = WV \sin |WD - RH|$$

$$HWC = WV \cos |WD - RH|$$

$$XWC < (HWC + 64.865)/3.243$$

Note: This is the equation of the line which defines the RECOMMENDED/NOT RECOMMENDED regions on the NATOPS crosswind landing chart.

$$MTAS = 3.243XWC + 15.135$$

where

XWC = crosswind component [knots]

WV = wind velocity [knots]

WD = wind direction [degrees]

RH = runway heading [degrees]

HWC = headwind component [knots]

MTAS = minimum nose wheel liftoff speed [KTAS]

## 2. PROGRAMS AND SUBROUTINES USED

None.

## 3. FLAGS, DATA STORAGE REGISTERS AND PROGRAM STORAGE

### REQUIREMENTS

a. Flags used: none.

b. Data storage registers.

Register:	Contents:
R00	Runway heading (RH)
R01	Wind direction (WD)

Register:	Contents:
R02	Wind velocity (WV)
R03	WD - RH
R04	Crosswind component (XWC)
R05	Headwind component (HWC)

c. Program storage requirement is 22 registers, 152 bytes.


#### 4. FLOWCHART

See following page.

#### 5. PROGRAM LISTING

01♦LBL "XWL	27 3.243
"	28 /
02 "RWY HDG	29 RCL 04
?"	30 X>Y?
03 PROMPT	31 GTO 01
04 STO 00	32 "RECOMME
05 "WIND DI	NDED"
R?"	33 PROMPT
06 PROMPT	34 GTO 02
07 STO 01	35♦LBL 01
08 "WIND VE	36 "NOT REC
L?"	OM,D"
09 PROMPT	37 PROMPT
10 STO 02	38♦LBL 02
11 RCL 00	39 RCL 04
12 RCL 01	40 3.243
13 -	41 *
14 ABS	42 15.135
15 STO 03	43 +
16 SIN	44 FIX 0
17 RCL 02	45 "MIN TAS
18 *	="
19 STO 04	46 ARCL X
20 RCL 03	47 PROMPT
21 COS	48 "HW="
22 RCL 02	49 ARCL 05
23 *	50 PROMPT
24 STO 05	51 "XW="
25 64.865	52 ARCL 04
26 +	53 PROMPT
	54 GTO "XWL
	"
	55 END

XWL

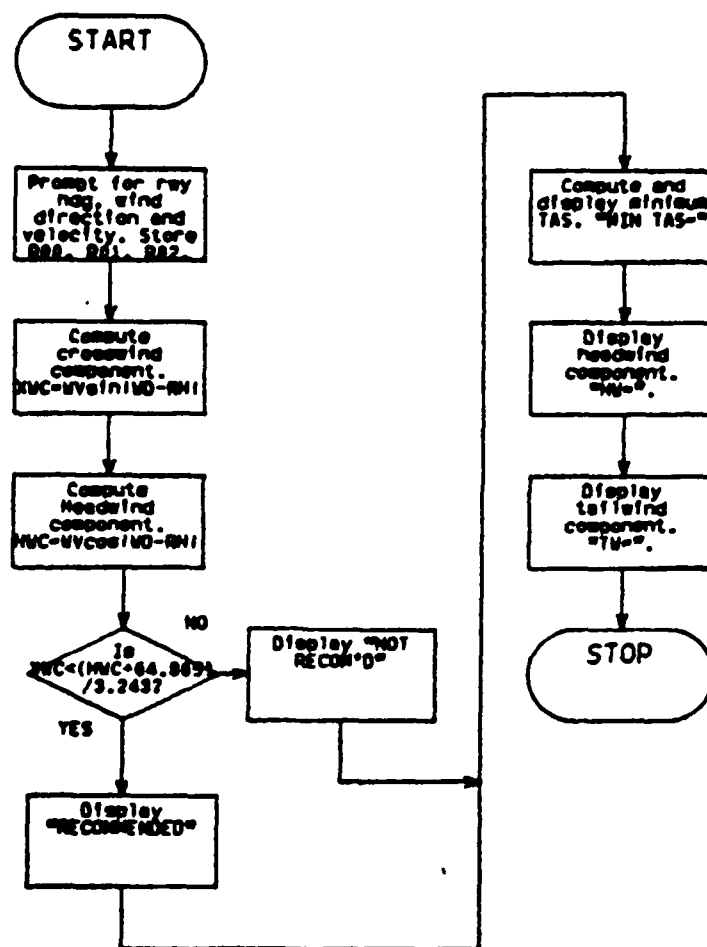

LIST OF REFERENCES

1. NATOPS Flight Manual, Navy Model A-6E/A-6E TRAM/KA-6D Aircraft, NAVAIR 01-85-ADF-1, U. S. Navy, 1981.
2. The HP-41C/CV Alphanumeric Full Performance Calculator, Owner's Handbook and Programming Guide, Corvallis, Oregon: Hewlett-Packard Company, April 1982.
3. NATOPS Pocket Checklist A-6E/A-6E TRAM/KA-6D Aircraft, NAVAIR 01-85-ADF-1B, U. S. Navy, 1981.
4. Campbell, Richard W. and Robert K. Champney, The A-6E/HP41CV Pocket Sized Flight Performance Advisory System, research paper submitted in fulfillment of AE 3001, Aircraft Energy Conservation, Naval Postgraduate School, Monterey, California, December 1981.

## LIST OF REFERENCES

1. Siegel, William Morris, Computerization of Tactical Aircraft Performance Data For Fleet Application, M.S. Thesis, Naval Postgraduate School, Monterey, California, 1978.
2. Restivo, Johnny Dean, Computerization of Aircraft Naval Air Training and Operating Procedures Standardization (NATOPS) Flight Performance Charts, M.S. Thesis, Naval Postgraduate School, Monterey, California, 1978.
3. Campbell, Richard W. and Robert K. Champney, The A-6E/HP-41CV Pocket Sized Flight Performance Advisory System, unpublished, Naval Postgraduate School, Monterey, California, December 1981.
4. Naval Postgraduate School Report NPS67-82-003, HP-41CV Flight Performance Advisory System (FPAS) for the E-2C, E-2B, and C-2 Aircraft, by Dennis R. Ferrell, June, 1977.
5. NATOPS Flight Manual, Navy Model A-6E/A-6E TRAM/KA-6D Aircraft, NAVAIR 01-85ADF-1, U. S. Navy, 1981.
6. NATOPS Pocket Checklist A-6E/A-6E TRAM/KA-6D Aircraft, NAVAIR 01-85-ADF-1B, U. S. Navy, 1981.
7. Dixon, W. J., editor, BMDP Statistical Software, 1981 Edition, pp. 264-75, University of California Press, Berkeley, California, 1981.
8. Harnett, Donald L. and James L Murphy, Introductory Statistical Analysis, 2nd ed., pp. 501-45, Addison-Wesley, Reading, Massachusetts, 1980.
9. The HP-41C/CV Alphanumeric Full Performance Calculator, Owner's Handbook and Programming Guide, Corvallis, Oregon: Hewlett-Packard Company, April 1982.
10. The HP-41C/CV Standard Applications Handbook, pp. 42-8, Hewlett-Packard Company, Corvallis, Oregon, January 1982.

# INITIAL DISTRIBUTION LIST

	No. Copies
1. Defense Technical Information Center Cameron Station Alexandria, Virginia 22314	2
2. Library, Code 0142 Naval Postgraduate School Monterey, California 93943	2
3. Department Chairman, Code 67 Department of Aeronautics Naval Postgraduate School Monterey, California 93943	1
4. Associate Professor Donald M. Layton, Code 67Ln Department of Aeronautics Naval Postgraduate School Monterey, California 93943	5
5. LCDR Douglas F. Hargrave, USN Project Manager for A-6/EA-6 Naval Air Systems Command (PMA-234) Washington, DC 20361	2
6. ENS Stephen D. Nordel, USN Naval Aviation Schools Command Building 633 Naval Air Station Pensacola, Florida 32508	1

END

FILMED

4-84

DTIC